



**classic**  
architectural group

**For Every Step**



## Product Data Sheet

# Vantt 2500

## Roll-up Aluminium Matting

Aluminium matting with Zoit insert

Integra Vantt 2500 is the first of three options available in the Vantt series. The Vantt 2500 offers the unique features of the innovative flexible interlocking system, however it incorporates the Zoit micro-ribbed 'carpet type' matting for the budget conscious buyer.

## Specification Guide

Install Integra Vantt 2500 entrance matting featuring interlocking (insert aluminium colour) anodised aluminium scraper bars with (insert inserts colour) matting inserts and flexible roll-up function. If required, install Integra INFR10 aluminium mat frame to suit recess, in accordance with manufacturer's recommendations. Available from: Classic Architectural Group, 1300 244 377, [info@classic-arch.com](mailto:info@classic-arch.com)

## Application

Recess into mat wells, surface mount with ramp frame, wall-to-wall in airlocks and lobbies. Able to be cut into any shape or form providing the solution for architecturally shaped entrances and revolving doorways. Rated to suit medium traffic areas.

**Suitable for:** Small office buildings, small shopping centres, schools and factories.



Easy to clean. Highly effective scrape and wipe cleaning action



Suitable for medium traffic application



Wheelchair friendly



Rubber cushioned back for quietness underfoot



Rolls up easily for cleaning



Easily shaped for curved entrances or revolving doors



Easy interlocking system




Lifetime warranty.  
Customer satisfaction  
guarantee.



**Installation Services**  
available




Onyx



Charcoal



Ocean

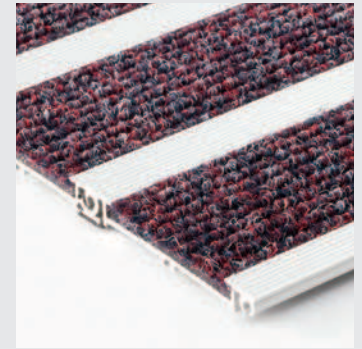

Cherry

## Colour Guide

This guide shows the available Integra Vantt 2500 matting color configurations. Please note that these swatches are to remain as a guide only and actual colours may vary.

### Benefits

- Reduces cleaning time of surrounding floor finishes
- Minimises costly slip-and-fall accidents
- Stops dirt at the door for a cleaner environment
- Enhances entrance appearance and acoustics

### Environmental Assessment

#### L.I.F.E. Program

Product takeback program.

This product's manufacture is environmentally compatible, and includes the use of recycled materials and production waste, and the use of recycled raw materials.

### Technical Specifications

#### Nominal Size

Made to order

#### Custom Shaping

Yes can be shaped to any size and shape

#### Construction ISO 2424

Needled pile

#### Pile Yarn Composition ISO 2424

100% PP

#### Pile Weight

750 g/m<sup>2</sup> nom

#### Pile Height ISO 1765

2.5mm average

#### Total Thickness ISO 1765

10.0mm average

#### Total Mass ISO 8543

6700 g/m<sup>2</sup> nom

#### Backing

Intraback DB gel latex

#### Colors

Onyx, Charcoal, Ocean, Cherry

Aluminium: Natural anodised

#### Frames

Recessed: Suits the INFR10 framing system

Surface: Suits the IRF1180 Ramp framing system

Matting Insert Option



Lifetime warranty.  
Customer satisfaction  
guarantee.



Installation Services  
available