



**classic**  
architectural group

**For Every Step**



## Classic Integra

# Vantt 2500


## Roll-up Aluminium Matting

Classic Integra Vantt 2500 is the first of four options available in the Vantt range. The Vantt 2500 offers the unique features of the innovative flexible interlocking system, however it incorporates the Zoit micro-ribbed 'carpet type' matting for the budget conscious buyer.


### Application

Recess into mat wells, surface mount with ramp frame, wall-to-wall in airlocks and lobbies. Able to be cut into any shape or form providing the solution for architecturally shaped entrances and revolving doorways. Rated to suit medium traffic areas.

**Suitable for:** Small office buildings, small shopping centres, schools and factories.

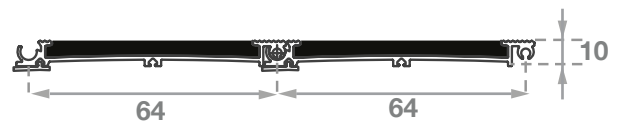


 Suitable for medium traffic applications

 Easy to clean, highly effective scrape and wipe cleaning action

 Wheelchair friendly

 Rubber cushioned back for quietness underfoot

 Rolls up easily for cleaning

 Easily shaped for curved entrances or revolving doors

 Easy interlocking system

**10YR**  
WARRANTY

**INSTALLATION**  
SERVICES  
AVAILABLE

**AS1428**  
COMPLIANT

## Matting Colours

---



Onyx



Charcoal

## Aluminium Colours

---



Natural

### Features

- Reduces cleaning time of surrounding floor finishes
- Minimises costly slip-and-fall accidents
- Stops dirt at the door for a cleaner environment
- Enhances entrance appearance and acoustics

### Environmental Assessment

#### L.I.F.E. Program

Product takeback program. This product's manufacture is environmentally compatible, and includes the use of recycled materials and production waste, and the use of recycled raw materials.

### Specification Guide

---

#### Nominal Size

Made to order

#### Custom Shaping

Yes can be shaped to any size and shape

#### Construction ISO 2424

Needled pile

#### Pile Yarn Composition ISO 2424

100% PP

#### Pile Weight

750 g/m<sup>2</sup> nom

#### Pile Height ISO 1765

2.5mm average

#### Total Thickness ISO 1765

10.0mm average

#### Total Mass ISO 8543

6700 g/m<sup>2</sup> nom

#### Backing

Intraback DB gel latex

#### Frames

**Recessed:** Suits the INFR11 framing system

**Surface:** Suits the INFR1180 ramp framing system