



classic
architectural group

product catalogue

edition 7

architectural solutions


**Stair
Nosings**





We do more than you think...

Where practicality meets striking design, Classic's range of public access and safety solutions is a building professional's dream.

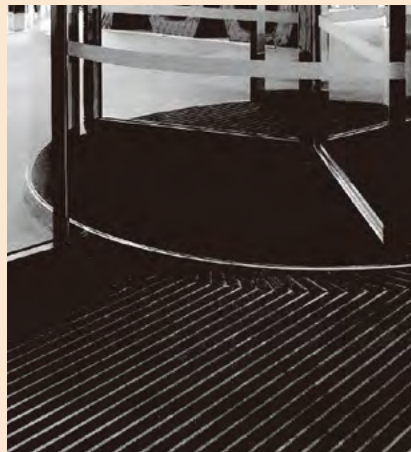

Entrance Matting

Maintaining your building's presentation, longevity and a healthy environment, Classic's Integra Entrance Matting range creates cleaner, safer entrance areas. With customised options for both interior and exterior applications, our entrance mats keep up with your foot and wheeled traffic, effectively retaining dirt and moisture. Asset protection that aesthetically pleases, minimising your floor maintenance costs and reducing slip hazards.

Stopping the dirt,
stopping the show,
it's our winning entry.



Stair Nosings

The professional finish to any access stair and ramp area, Classic's Tredfx Stair Nosings elevate smart looks and safety. With a wide range of anti-slip solutions for various substrates and environments, our stair nosings and tapes are rated for commercial grade use. Architecturally designed for your project, providing enhanced safety and accessibility for all.

Stepping up to every
challenge, **we'll give
you the extra grip.**



Tactile Indicators

A must for all public access areas, Classic's Tredfx Tactile Indicators give directional guidance and alert of impending hazards. Empowering our visually-impaired community in shared spaces, we offer a diverse variety of styles and colours to meet your tactile floor safety requirements. From stainless steel and brass, to polyurethane and ceramic, our cutting-edge Tredfx Tactile range meets all NCC and relevant Australian Standards.


Navigating you with
certainty, **you'll never
lose your bearings
with us.**



Floor Trims & Covers

Classic's Tredfx Floor Trims, Expansion Joints and Covers are purposefully designed and engineered for commercial flooring applications. Overcoming small floor height discrepancies and covering joins between differing floor surfaces, our floor trims maximise safety while preserving aesthetics. Our heavy-duty expansion joint covers are built for protection and longevity, withstanding high-traffic areas.


Where two become
one, **a seamless
integration for all.**

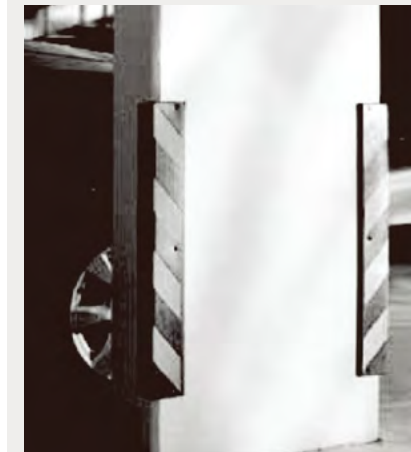

Car Park Safety

Classic's Car Park Safety range includes Wheel Stops, Bollards, Speed Humps, Corner Guards, Signage, Convex Mirrors and much more. Keeping pace with modern building design and techniques, we'll collaborate with you to enhance the protection of your car parking space and its users. From traffic flow to visual safety, we've got you sorted.

Driven to succeed,
**we'll see you at the
finish line.**

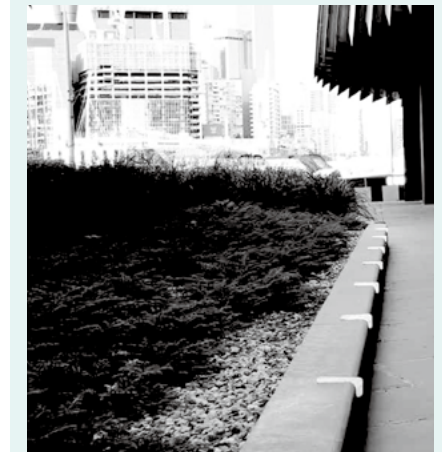

Bike Racks & Skate Deterrents

Classic's Bike Racks provide cyclists with safe bicycle storage while encouraging communities to embrace more sustainable living. Classic's Skatestop Skate Deterrents protect your landscape's presentation and longevity, offering safety, durability and aesthetics. Our skate deterrents work hard to save you time and money on damage costs caused by skateboarders, in-line skates and bikes. It's smart, simple prevention.

We'll get rolling on
your projects **quick
smart.**


STAIR NOSING

Solid Brass



- Solid brass stair nosings
- Naturally beautiful aesthetic
- Ages gracefully
- Application types - surface mount, rebated, vinyl and rubber
- Large range of nosing insert colour options, available in ribbed polymer and grit
- Interior and exterior use
- Select a product with a slip resistant rating that suits your project's needs
- Complete the look with our solid brass tactile indicators, pg. 94

Carpet / Vinyl / Rubber

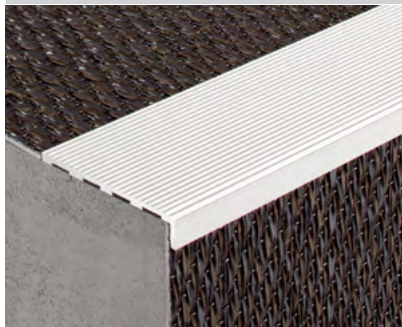

- Suitable for carpet, vinyl and rubber applications
- Contemporary appearance
- Hard wearing
- Aluminium nosings to suit wide range of substrates
- Large range of nosing insert colour options, available in ribbed polymer, ribbed metal, ribbed aluminium and grit
- Options for interior and exterior use
- Select a product with a slip resistant rating that suits your project's needs
- Looking for solid brass? Refer pg. 58

Fibreglass



- Fibreglass stair nosings
- Suitable for surface mount applications
- Ideal for industrial use
- Withstands extreme conditions
- Withstands high levels of moisture
- Resistant to most chemicals
- Non-conductive and fire resistant
- Highest P5 slip resistance rating
- Options for interior and exterior use

Accessories




- Accessories for stair nosings
- Adhesive options to assist with easy installation
- Suitable for Classic Tredfx stair nosings

WHY CHOOSE CLASSIC?

- Consultative approach
- Customised solutions
- End-to-end fulfilment
- Unrivalled knowledge of standards
- Lifetime warranty
- Over 40 years' experience
- People and operations across Australia

Surface Mount

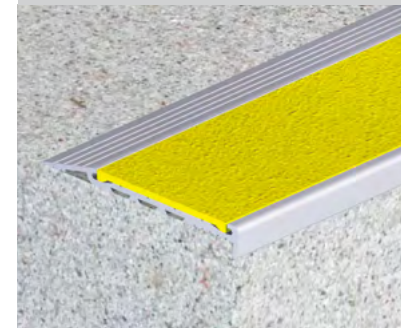

- Suitable for surface mount applications
- Contemporary appearance
- Hard wearing
- Aluminium nosings to suit wide range of substrates
- Ideal for retro-fitting and new staircases
- Large range of nosing insert options, available in aluminium, ribbed polymer, grit, luminescent and self-adhesive
- Options for interior and exterior use
- Select a product with a slip resistant rating that suits your project's needs
- Looking for solid brass? Refer pg. 58

Rebated - Timber / Tile



- Suitable for rebated applications - timber and tiles
- Modern, low profile and streamlined
- Hard wearing
- Aluminium nosings to suit wide range of substrates
- Large range of nosing insert colour options, available in ribbed polymer, ribbed aluminium and grit
- Interior and exterior use
- Select a product with a slip resistant rating that suits your project's needs
- Looking for solid brass? Refer pg. 58

Anti-Slip Tapes



- Anti-slip tapes
- Self-adhesive for affordable and easy installation
- Ideal for access ramps
- Colours - black, yellow, clear and white
- Interior and exterior use
- Select a product with a slip resistant rating that suits your project's needs

Classic Tredfx Solid Brass

Stair Nosings

- Solid brass stair nosings
- Naturally beautiful aesthetic
- Ages gracefully
- Application types - surface mount, rebated, vinyl and rubber
- Large range of nosing insert colour options, available in ribbed polymer and grit
- Interior and exterior use
- Select a product with a slip resistant rating that suits your project's needs
- LRV wet and dry ratings, pg. 90
- Complete the look with our solid brass tactile indicators, pg. 94
- Looking for skate deterrents? Shop our Skatestop solid brass range, pg. 164

LIFETIME
WARRANTY

INSTALLATION
SERVICES
AVAILABLE



Classic Tredfx

SNB041-H

Solid Brass Safety Stair Nosing
for Multiple Applications

- Interior and exterior use
- Square back and square front



LRV Rating
(pg 90)



P4 Slip
Resistance
Rating



Fire
Resistant



AS1428
NCC
Compliant

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount, Rebated, Vinyl, Rubber

Brass Colours



Natural Brass



Classic Tredfx

SBR104-H

Solid Brass Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back, short raked front, pre-drilled and countersunk
- Ribbed polymer insert



LRV Rating
(pg 90)



P3 Slip
resistance
rating



Fire test
report
available



AS1428
NCC
Compliant

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount

Insert Colours



Black



Blue



Dark Grey



Red



Tangerine




Mid Grey



Yellow



Beige



Light Grey



Luminescent

Upon request



Ultra Violet



Raspberry



Teal



Lime Green





Coral

Brass Colours



Natural Brass



Classic Tredfx

DKR104-H

Solid Brass Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back, short raked front, pre-drilled and countersunk
- Grit insert



LRV Rating
(pg 90)



P5 Slip
resistance
rating



Fire test
report
available



AS1428
NCC
Compliant

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount

Insert Colours



Black



Yellow



Light Grey



Luminescent

Brass Colours



Natural Brass





Classic Tredfx

INB033-H

Solid Brass Safety Stair Nosing
for Rebated Applications

- Interior and exterior use
- Square edged



LRV Rating
(pg 90)



P4 Slip
resistance
rating



Fire
Resistant



AS1428
NCC
Compliant

Specifications

Length

5850mm (Cut-to-length service available)


Application

Rebated

Brass Colours



Natural Brass



Classic Tredfx

SBR142-H

Solid Brass Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back and folded front
- Ribbed polymer insert
- Pre-drilled and countersunk



LRV Rating
(pg 90)



P3 Slip
resistance
rating



Fire test
report
available

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount

Insert Colours



Black



Blue



Dark Grey



Red



Tangerine



Mid Grey



Yellow




Beige



Light Grey



Luminescent



Ultra Violet



Raspberry



Teal



Lime Green




Coral

Brass Colours



Natural Brass

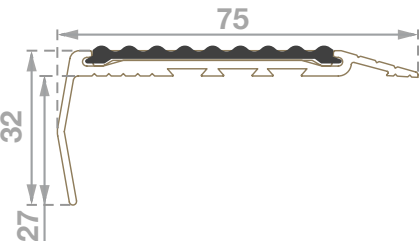

Classic Tredfx

DKR142-H

Solid Brass Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back and folded front
- Grit insert
- Pre-drilled and countersunk



LRV Rating
(pg 90)



P5 Slip
resistance
rating



Fire test
report
available

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount

Insert Colours



Black



Yellow



Light Grey





Luminescent

Brass Colours



Natural Brass

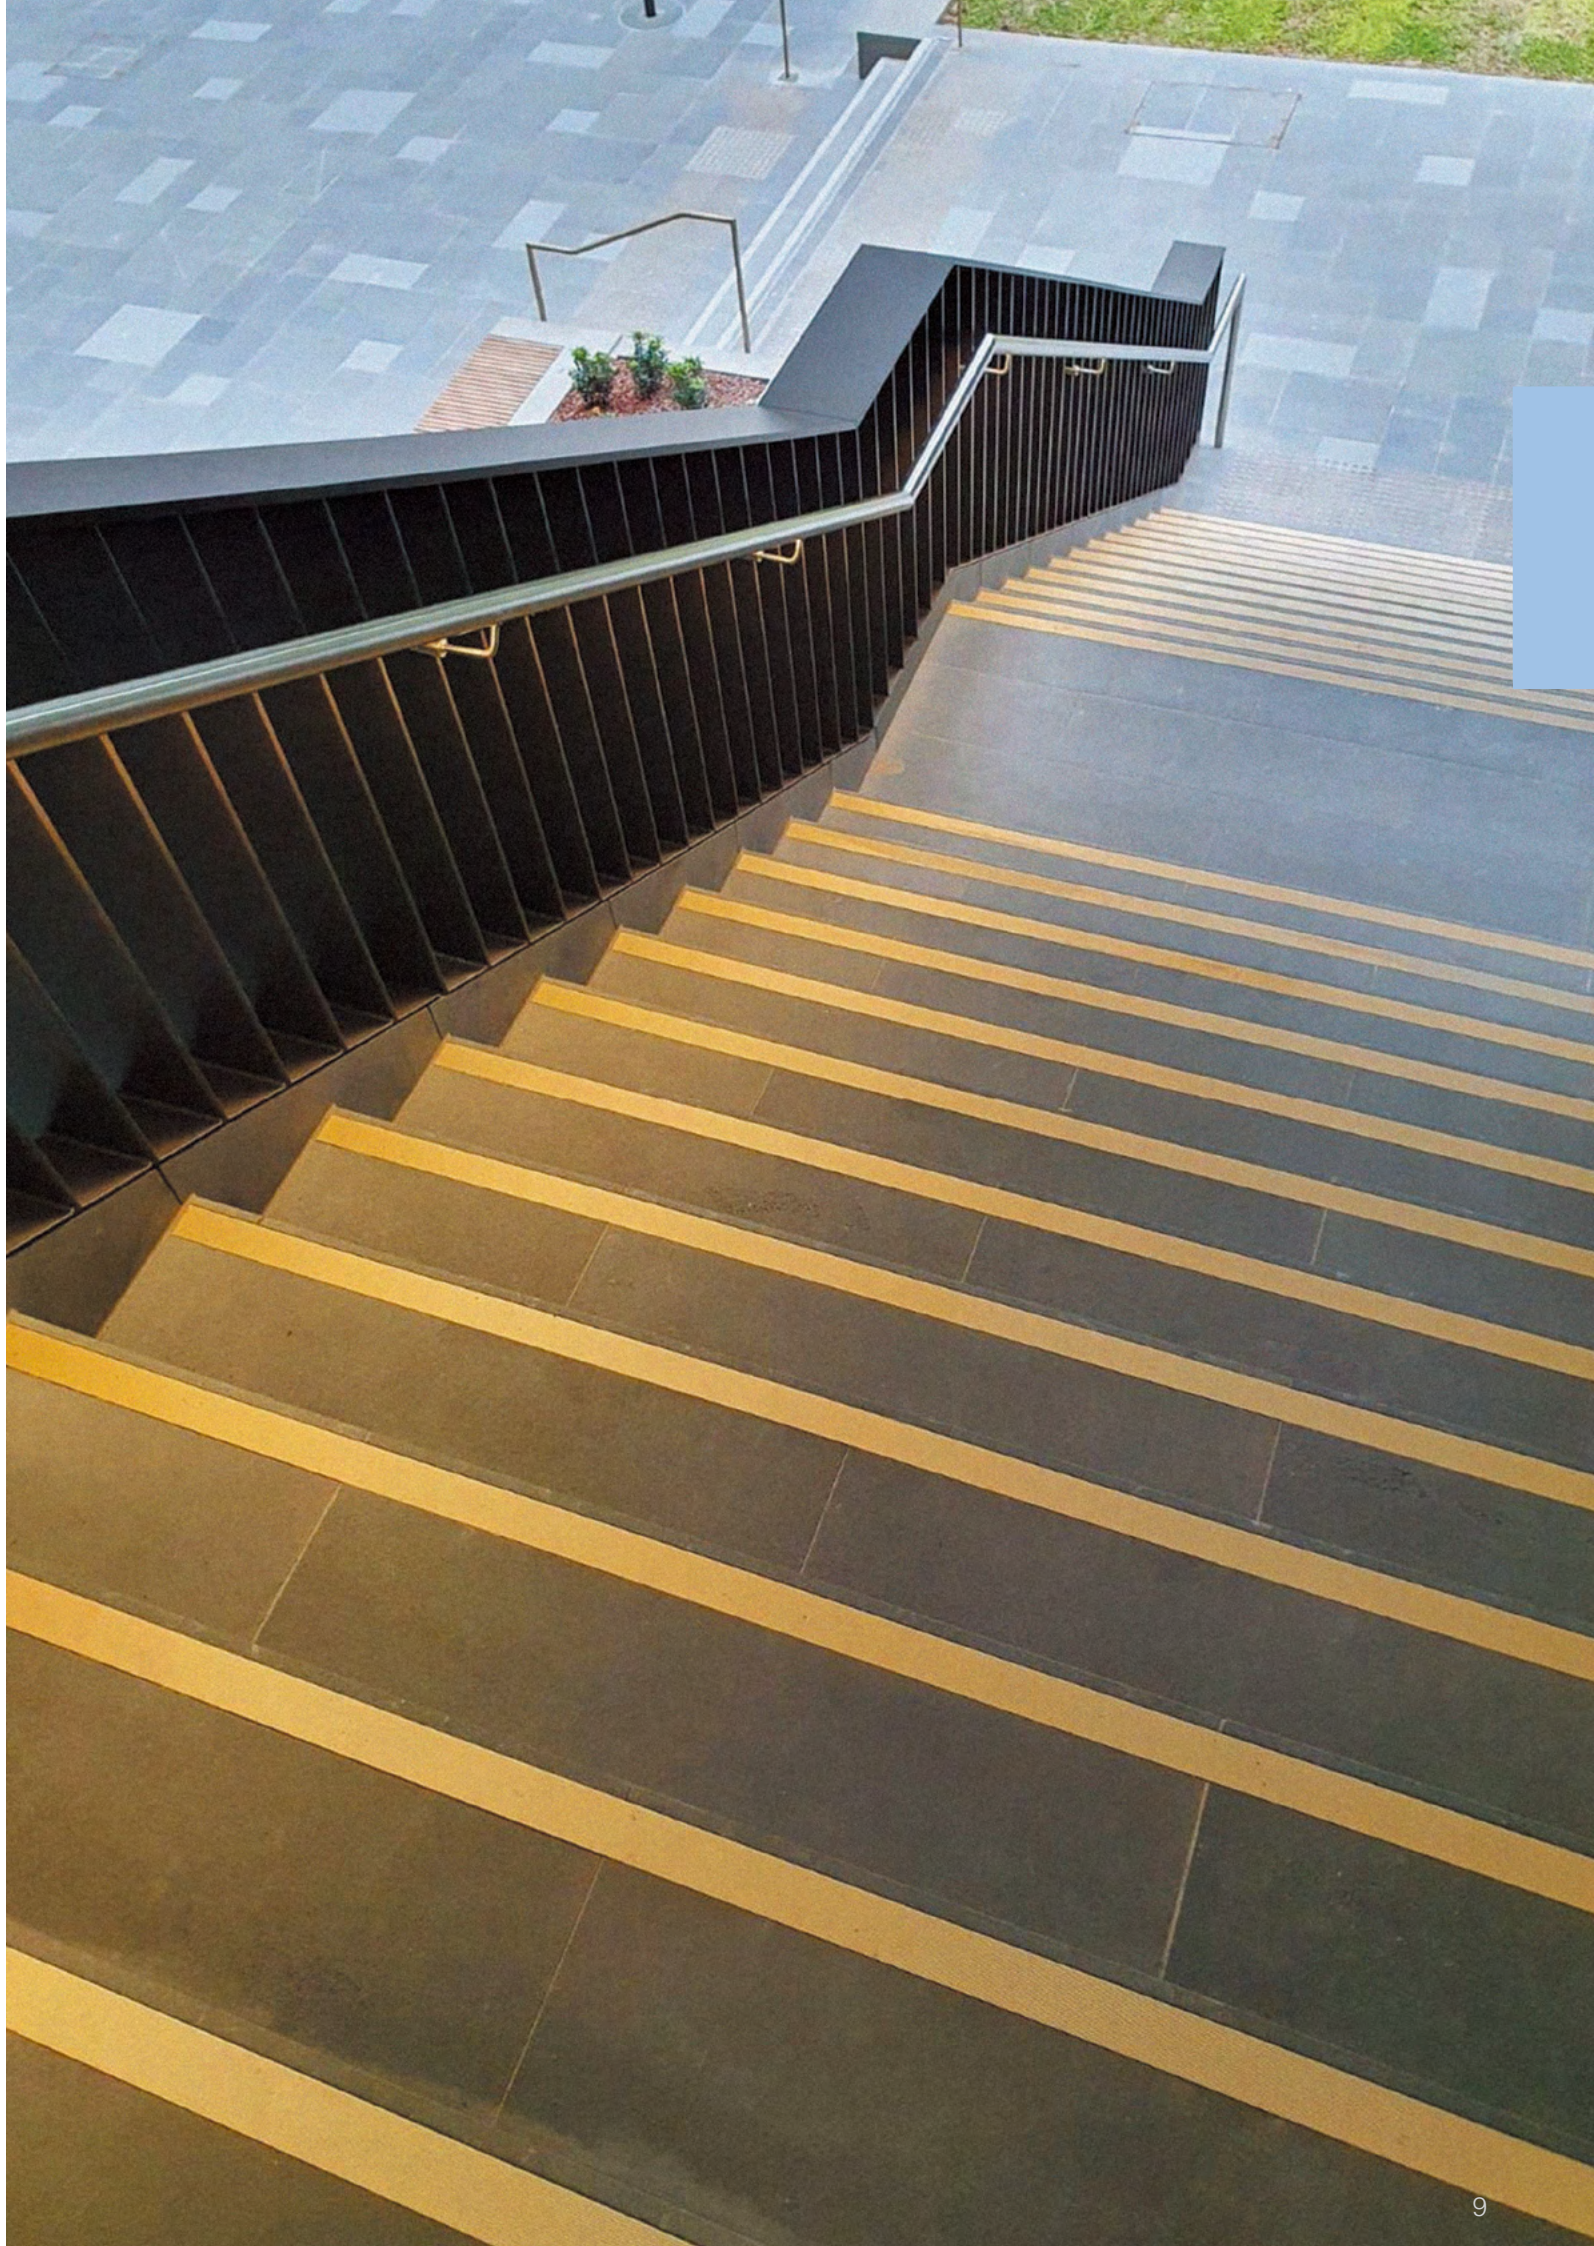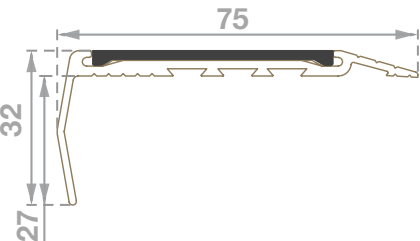

Classic Tredfx Surface Mount

Stair Nosings

- Suitable for surface mount applications
- Contemporary appearance
- Hard wearing
- Aluminium nosings to suit wide range of substrates
- Ideal for retro-fitting and new staircases
- Large range of nosing insert options, available in aluminium, ribbed polymer, grit, luminescent and self-adhesive
- Options for interior and exterior use
- Select a product with a slip resistant rating that suits your project's needs
- LRV wet and dry ratings, pg. 90
- Looking for solid brass? Refer pg. 58

LIFETIME
WARRANTY

INSTALLATION
SERVICES
AVAILABLE



Classic Tredfx

SNR019

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back, short raked front



LRV Rating
(pg 90)



P4 Slip
resistance
rating



Fire test
report
available



Compliant

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount

Aluminium Colours



Black



Natural

Upon request



Bronze




Saffron



Gold



Platinum



Classic Tredfx

SBR104

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back, folded front
- Ribbed polymer insert
- Pre-drilled and countersunk



LRV Rating
(pg 90)



P3 Slip
resistance
rating



Fire test
report
available



Compliant

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount

Insert Colours



Black



Blue



Dark Grey



Red



Tangerine




Mid Grey



Yellow



Beige



Light Grey



White

Upon request



Ultra Violet



Raspberry



Teal



Lime Green



Coral

Aluminium Colours



Black



Natural

Upon request





Bronze



Saffron



Gold

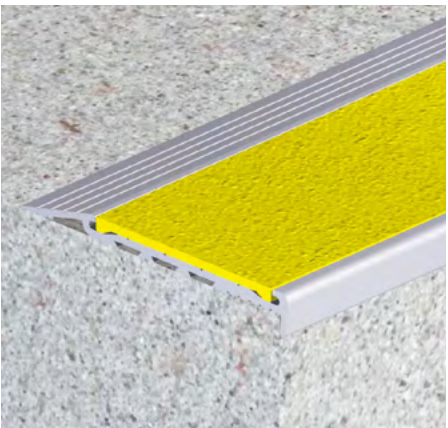

Classic Tredfx

DKR104

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back, short raked front
- Grit insert
- Pre-drilled and countersunk



LRV Rating
(pg 90)



P5 Slip
resistance
rating



Fire test
report
available



Compliant

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount

Insert Colours



Black



Yellow



Light Grey



Luminescent

Aluminium Colours



Black



Natural

Upon request




Bronze



Saffron



Gold





Classic Tredfx

FMR104

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior use
- Short raked front
- Aluminium insert
- Pre-drilled and countersunk

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount

Insert Colours

Aluminium Colours

Upon request

Aluminium Colours

Upon request



Classic Tredfx

SBR103

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back, folded front
- Ribbed polymer insert
- Pre-drilled and countersunk

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount

Insert Colours

Aluminium Colours

Upon request

Aluminium Colours

Upon request



Classic Tredfx

DKR103

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back, folded front
- Grit insert
- Pre-drilled and countersunk

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount

Insert Colours

Aluminium Colours

Upon request

Aluminium Colours

Upon request



Classic Tredfx

LBR128

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior use
- Ramped back, short raked front
- Luminescent and polymer insert
- Pre-drilled and countersunk

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount

Insert Colours

Aluminium Colours

Upon request

Aluminium Colours

Upon request



Classic Tredfx

LKR128

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back, short raked front
- Luminescent and grit insert
- Pre-drilled and countersunk

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount

Insert Colours

Aluminium Colours

Upon request

Aluminium Colours

Upon request



Classic Tredfx

LBR127

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior use
- Ramped back, folded front
- Luminescent and polymer insert
- Pre-drilled and countersunk

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount


Insert Colours

Aluminium Colours

Upon request

Aluminium Colours

Upon request

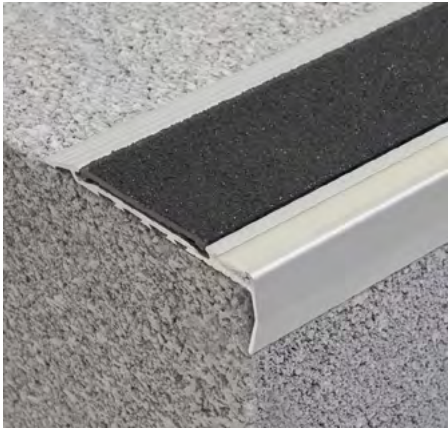

Classic Tredfx

LKR127

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back, folded front
- Luminescent and grit insert
- Pre-drilled and countersunk

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount


Insert Colours

BlackYellowLight GreyLuminescent

Aluminium Colours

BlackUpon requestNatural

BronzeSaffronGold

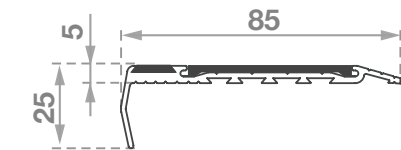

Classic Tredfx

SBR135

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back, long raked front
- Ribbed polymer insert
- Pre-drilled and countersunk

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount

Insert Colours

BlackBlueDark GreyRed

TangerineMid GreyYellowBeige

Light GreyWhite

Upon request


Ultra VioletRaspberryTealLime Green

Coral

Aluminium Colours

BlackUpon requestNatural

BronzeSaffronGold

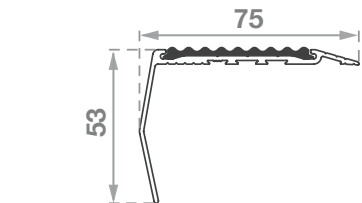

Classic Tredfx

DKR135

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back, long raked front
- Grit insert
- Pre-drilled and countersunk

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount

Insert Colours


BlackYellowLight GreyLuminescent

Aluminium Colours

BlackNatural

Upon request

BronzeSaffronGold

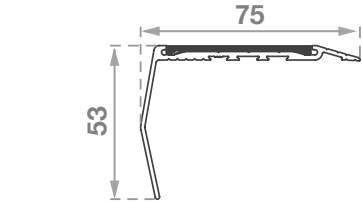

Classic Tredfx

DKR404

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back, short raked front
- Grit insert
- Pre-drilled and countersunk

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount

Insert Colours


Black/NaturalYellow/NaturalWhite/NaturalBlack/Black

Aluminium Colours

BlackNatural

Upon request

BronzeSaffronGold



Classic Tredfx

LKR428

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back, short raked front
- Luminescent and grit insert
- Pre-drilled and countersunk

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount


Insert Colours

Black/NaturalYellow/NaturalWhite/NaturalBlack/Black

Aluminium Colours

BlackUpon requestNatural

BronzeSaffronGold



Classic Tredfx

DKR403

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back
- Grit insert
- Pre-drilled and countersunk

Specifications

Length

5850mm (Cut-to-length service available)

Application

Surface Mount

Insert Colours


Black/NaturalYellow/NaturalWhite/NaturalBlack/Black

Aluminium Colours

BlackNatural

Upon request

BronzeSaffronGold

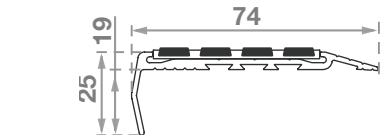

Surface Mount



Classic Tredfx

LKR427

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back, folded front
- Luminescent and grit insert
- Pre-drilled and countersunk

LRV Rating
(pg 90)

P5 Slip
resistance
rating

Fire test
report
available

Specifications

Length
5850mm (Cut-to-length service available)

Application
Surface Mount

Insert Colours

Aluminium Colours

Black


Natural

Upon request

Bronze

Saffron

Gold

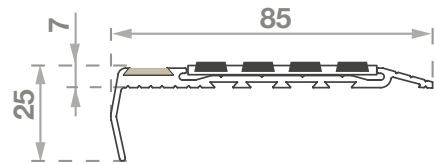

Classic Tredfx

DKR435

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Ramped back, long raked front
- Grit insert
- Pre-drilled and countersunk

LRV Rating
(pg 90)

P5 Slip
resistance
rating

Fire test
report
available

Specifications

Length
5850mm (Cut-to-length service available)

Application
Surface Mount

Insert Colours

Aluminium Colours

Black


Natural

Upon request

Bronze

Saffron

Gold

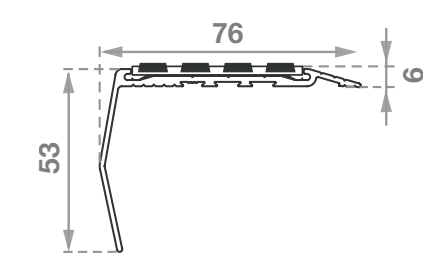

Classic Tredfx

A-138R

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Anodised aluminium in natural (satin silver) finish
- Low profile, with ramped back edge to avoid trip hazards
- 1 x 50mm non-slip self-adhesive insert (Black or yellow)
- Standard 3650mm lengths (packs of 10 lengths)
- Supplied with adhesive

LRV Rating
(pg 90)

P5 Slip
resistance
rating

Fire test
report
available

AS1428
NCC
Compliant

Specifications

Length
3650mm

Application
Surface Mount

Insert Colours


Black

Yellow

Upon request

White

Grey



Classic Tredfx

A-137R

Aluminium Safety Stair Nosing
for Surface Mount Applications

- Interior and exterior use
- Anodised aluminium in natural (satin silver) finish
- Low profile, with ramped back edge to avoid trip hazards
- 1 x 50mm non-slip self-adhesive insert (Black or yellow)
- Standard 3650mm lengths (packs of 10 lengths)
- Supplied with adhesive

LRV Rating
(pg 90)

P5 Slip
resistance
rating

Fire test
report
available

Specifications

Length
3650mm

Application
Surface Mount

Insert Colours


Black

Yellow

Upon request

White

Grey

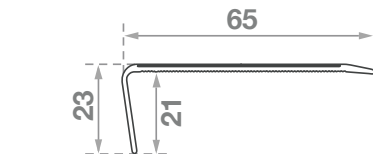

Classic Tredfx


Carpet / Vinyl / Rubber

Stair Nosings

- Contemporary appearance
- Hard wearing
- Aluminium nosings to suit wide range of substrates
- Large range of nosing insert colour options, available in ribbed polymer, ribbed metal, ribbed aluminium and grit
- Options for interior and exterior use
- Select a product with a slip resistant rating that suits your project's needs
- LRV wet and dry ratings, pg. 90
- Looking for solid brass? Refer pg. 58

LIFETIME
WARRANTY

INSTALLATION
SERVICES
AVAILABLE

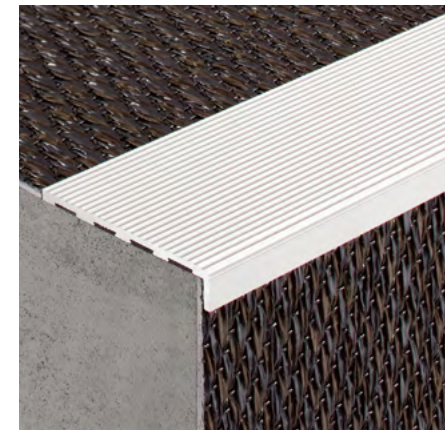

Classic Tredfx

SNB031

Aluminium Safety Stair Nosing
for Vinyl / Rubber

- Interior and exterior use
- Square back, short square front



LRV Rating
(pg 90)



P4 Slip
resistance
rating



Fire
Resistant



AS1428
NCC
Compliant

Specifications

Length

5850mm (Cut-to-length service available)

Application

Vinyl / Rubber (suits 3mm rebate)

Aluminium Colours



Black
Upon request



Natural



Bronze




Saffron



Gold



Platinum



Classic Tredfx

SBV105

Aluminium Safety Stair Nosing
for Vinyl / Rubber

- Interior and exterior use
- Gripper back, short raked front
- Ribbed polymer insert
- Pre-drilled and countersunk



LRV Rating
(pg 90)



P3 Slip
resistance
rating



Fire test
report
available



AS1428
NCC
Compliant

Specifications

Length

5850mm (Cut-to-length service available)

Application

Vinyl / Rubber (suits 2mm thickness)

Insert Colours



Black



Blue



Dark Grey



Red



Tangerine




Mid Grey



Yellow




Beige



Light Grey



White



Ultra Violet



Raspberry



Teal



Lime Green



Coral


Aluminium Colours



Black



Natural




Bronze



Saffron



Gold



Classic Tredfx

DKV105

Aluminium Safety Stair Nosing
for Vinyl / Rubber

- Interior and exterior use
- Gripper back, short raked front
- Grit insert
- Pre-drilled and countersunk



LRV Rating
(pg 90)



P5 Slip
resistance
rating



Fire test
report
available



AS1428
NCC
Compliant

Specifications

Length

5850mm (Cut-to-length service available)

Application

Vinyl / Rubber (suits 2mm thickness)

Insert Colours



Black



Yellow



Light Grey



Luminescent


Aluminium Colours



Black



Natural




Bronze




Saffron



Gold



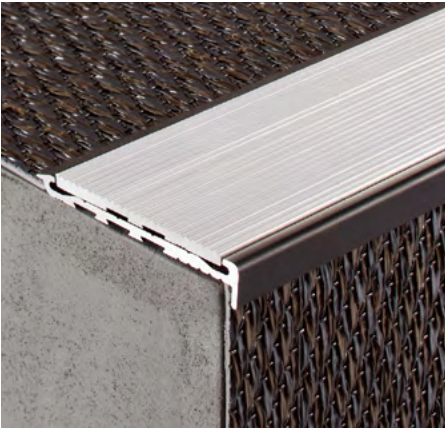

Classic Tredfx

FMV105

Aluminium Safety Stair Nosing
for Vinyl / Rubber

- Interior use
- Gripper back, short raked front
- Ribbed metal insert
- Pre-drilled and countersunk

LRV Rating
(pg 90)

P4 Slip
resistance
rating

Fire
Resistant

AS1428
NCC

Compliant

Specifications



Length
5850mm (Cut-to-length service available)

Application
Vinyl / Rubber (suits 2mm thickness)

Insert Colours



Aluminium Colours

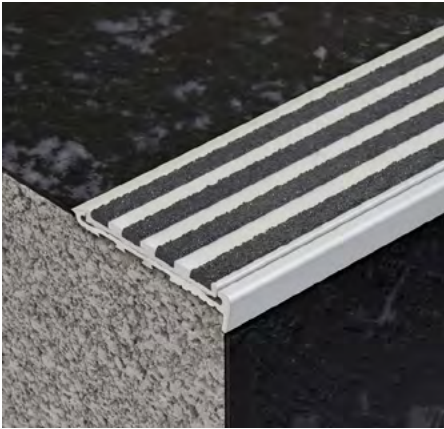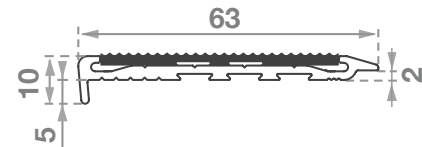

Classic Tredfx

DKV405

Aluminium Safety Stair Nosing
for Vinyl / Rubber

- Interior and exterior use
- Gripper back, short raked front
- Grit insert
- Pre-drilled and countersunk

LRV Rating
(refer to pg 90)

P5 Slip
resistance
rating

Fire test
report
available

Specifications


Length
5850mm (Cut-to-length service available)

Application
Vinyl / Rubber (suits 2mm thickness)

Insert Colours



Aluminium Colours



Classic Tredfx

PBD106

Aluminium Safety Stair Nosing
for Carpet / Rubber

- Interior use
- Gripper back, short raked front
- Ribbed polymer insert
- Pre-drilled and countersunk

LRV Rating
(pg 90)

P3 Slip
resistance
rating

Fire test
report
available

AS1428
NCC


Compliant

Specifications


Length
5850mm (Cut-to-length service available)

Application
Carpet / Rubber (suits 4-6mm thickness)

Insert Colours

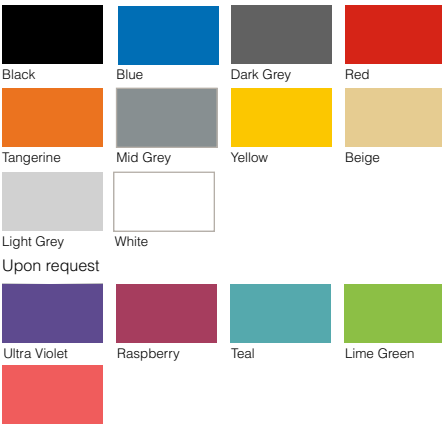

Aluminium Colours

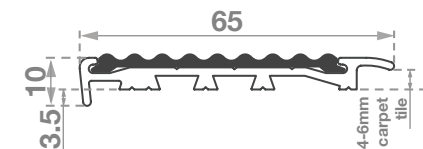

Classic Tredfx

PKD106

Aluminium Safety Stair Nosing
for Carpet / Rubber

- Interior use
- Gripper back, short raked front
- Grit insert
- Pre-drilled and countersunk

LRV Rating
(pg 90)

P5 Slip
resistance
rating

Fire test
report
available

AS1428
NCC

Compliant

Specifications




Length
5850mm (Cut-to-length service available)

Application
Carpet / Rubber (suits 4-6mm thickness)

Insert Colours



Aluminium Colours

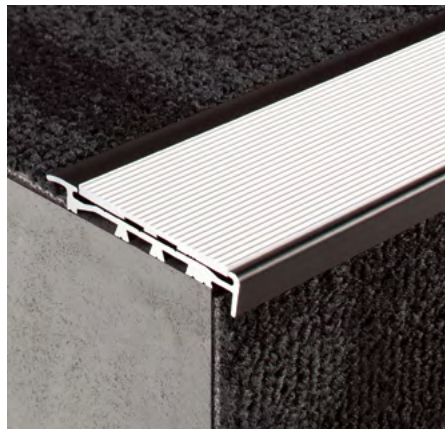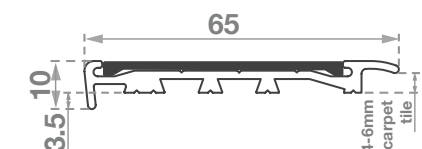

Classic Tredfx

FMD106

Aluminium Safety Stair Nosing
for Carpet / Rubber

- Interior use
- Gripper back, short raked front
- Ribbed metal insert
- Pre-drilled and countersunk

LRV Rating
(pg 90)

P4 Slip
resistance
rating

Fire
Resistant

AS1428
NCC

Compliant

Specifications



Length
5850mm (Cut-to-length service available)

Application
Carpet / Rubber (suits 4-6mm thickness)

Insert Colours



Aluminium Colours

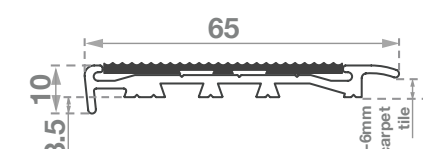

Classic Tredfx

PKD406

Aluminium Safety Stair Nosing
for Carpet / Rubber

- Interior use
- Gripper back, short raked front
- Grit insert
- Pre-drilled and countersunk

LRV Rating
(pg 90)

P5 Slip
resistance
rating

Fire test
report
available

Specifications


Length
5850mm (Cut-to-length service available)

Application
Carpet / Rubber (suits 4-6mm thickness)


Insert Colours



Aluminium Colours

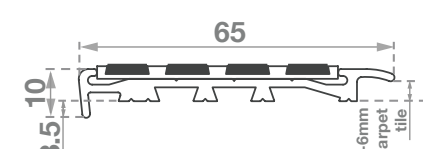

Multiple Applications

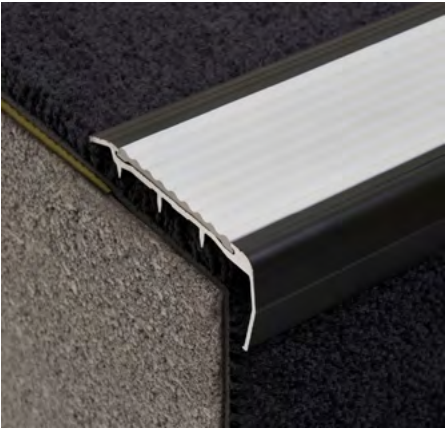

Classic Tredfx



PBC102

Aluminium Safety Stair Nosing for Carpet Applications

- Interior use
- Gripper back, folded front
- Ribbed polymer insert
- Pre-drilled and countersunk



Specifications
Length
5850mm (Cut-to-length service available)
Application
Carpet
Insert Colours

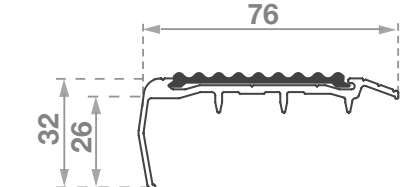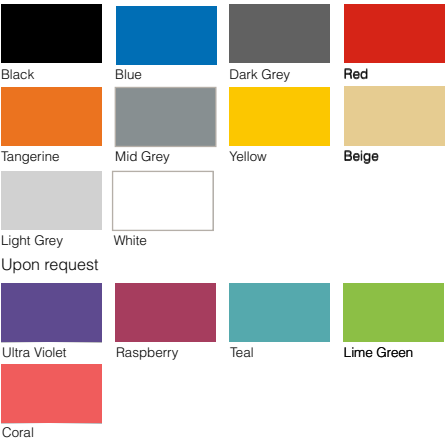

Classic Tredfx



PBD129

Aluminium Safety Stair Nosing for Carpet / Rubber

- Interior use
- Gripper back, folded front
- Ribbed polymer insert
- Pre-drilled and countersunk



Specifications
Length
5850mm (Cut-to-length service available)
Application
Carpet / Rubber (suits 4-6mm thickness)
Insert Colours

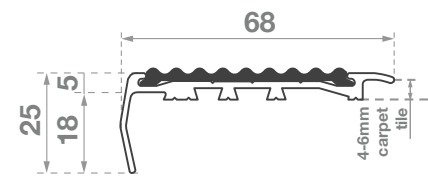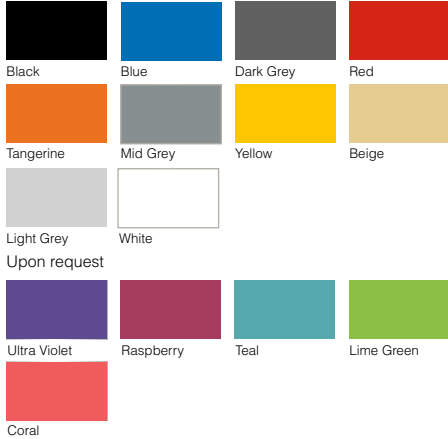

Classic Tredfx


PKD129

Aluminium Safety Stair Nosing for Carpet / Rubber

- Interior use
- Gripper back, folded front
- Grit insert
- Pre-drilled and countersunk



Specifications
Length
5850mm (Cut-to-length service available)
Application
Carpet / Rubber (suits 4-6mm thickness)
Insert Colours

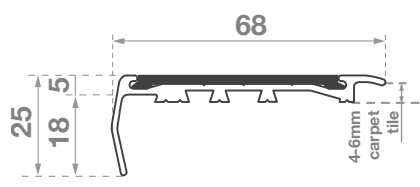

Classic Tredfx


FMD129

Aluminium Safety Stair Nosing for Carpet / Rubber

- Interior use
- Gripper back, folded front
- Ribbed aluminium insert
- Pre-drilled and countersunk



Specifications
Length
5850mm (Cut-to-length service available)
Application
Carpet / Rubber (suits 4-6mm thickness)
Insert Colours

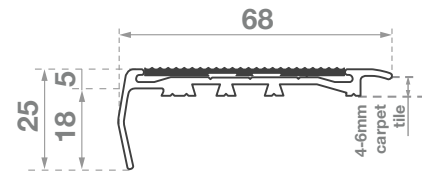

Classic Tredfx



PKD429

Aluminium Safety Stair Nosing for Carpet / Rubber

- Interior use
- Gripper back, folded front
- Grit insert
- Pre-drilled and countersunk



Specifications
Length
5850mm (Cut-to-length service available)
Application
Carpet / Rubber (suits 4-6mm thickness)
Insert Colours

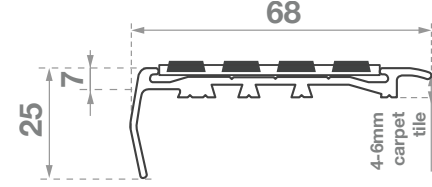

Classic Tredfx



PND045

Aluminium Safety Stair Nosing for Carpet Applications

- Interior use
- Gripper back, short raked front
- Ribbed top



Specifications
Length
5850mm (Cut-to-length service available)
Application
Carpet (suits 8-10mm thickness)
Aluminium Colours

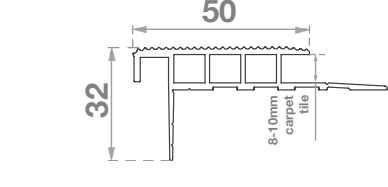



Classic Tredfx

PND046

Aluminium Safety Stair Nosing
for Carpet Applications

- Interior use
- Gripper back, short raked front
- Ribbed top

LRV Rating
(pg 90)

P4 Slip
resistance
rating

Fire
Resistant

AS1428
NCC

Compliant

Specifications

Length
5850mm (Cut-to-length service available)

Application
Carpet (suits 4-6mm thickness)

Aluminium Colours

Black


Natural

Upon request

Bronze

Saffron

Gold

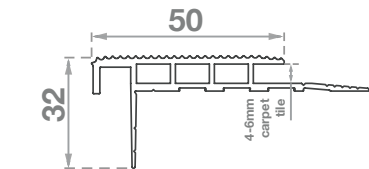

Classic Tredfx

PBD143

Aluminium Safety Stair Nosing
for Carpet Applications

- Interior use
- Gripper back, short raked front
- Ribbed polymer insert

LRV Rating
(pg 90)

P3 Slip
resistance
rating

Fire test
report
available

AS1428
NCC

Compliant

Specifications

Length
5850mm (Cut-to-length service available)

Application
Carpet (suits 8-10mm thickness)

Insert Colours

Black

Blue

Dark Grey

Red

Tangerine

Mid Grey

Yellow

Beige

Light Grey

White

Upon request

Ultra Violet

Raspberry

Teal

Lime Green

Coral

Aluminium Colours

Black


Natural

Upon request

Bronze

Saffron

Gold

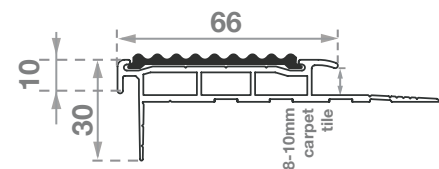

Classic Tredfx

PKD143

Aluminium Safety Stair Nosing
for Carpet Applications

- Interior use
- Gripper back, short raked front
- Grit insert

LRV Rating
(pg 90)

P5 Slip
resistance
rating

Fire test
report
available

AS1428
NCC

Compliant

Specifications

Length
5850mm (Cut-to-length service available)

Application
Carpet (suits 8-10mm thickness)

Insert Colours

Black

Yellow

Light Grey

Luminescent

Black/Natural

Yellow/Natural

White/Natural

Black/Black

Aluminium Colours

Black


Natural

Upon request

Bronze

Saffron

Gold

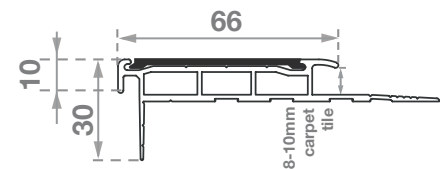

Classic Tredfx

PKD443

Aluminium Safety Stair Nosing
for Carpet Applications

- Interior use
- Gripper back and short raked front
- Grit insert

LRV Rating
(pg 90)

P5 Slip
resistance
rating

Fire test
report
available

AS1428
NCC

Compliant

Specifications

Length
5850mm (Cut-to-length service available)

Application
Carpet (suits 8-10mm thickness)

Insert Colours

Black/Natural

Yellow/Natural

White/Natural

Black/Black

Aluminium Colours

Black


Natural

Upon request

Bronze

Saffron

Gold

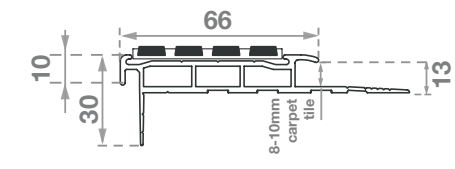

Classic Tredfx

PBD144

Aluminium Safety Stair Nosing
for Carpet Applications

- Interior use
- Gripper back, short raked front
- Ribbed polymer insert

LRV Rating
(pg 90)

P3 Slip
resistance
rating

Fire test
report
available

AS1428
NCC

Compliant

Specifications

Length
5850mm (Cut-to-length service available)

Application
Carpet (suits 4-6mm thickness)

Insert Colours

Black

Blue

Dark Grey

Red

Tangerine

Mid Grey

Yellow

Beige

Light Grey

White

Upon request

Ultra Violet

Raspberry

Teal

Lime Green

Coral

Aluminium Colours

Black


Natural

Upon request

Bronze

Saffron

Gold

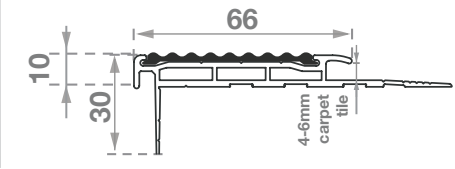

Classic Tredfx

PKD144

Aluminium Safety Stair Nosing
for Carpet Applications

- Interior use
- Gripper back, short raked front
- Grit insert

LRV Rating
(pg 90)

P5 Slip
resistance
rating

Fire test
report
available

AS1428
NCC

Compliant

Specifications

Length
5850mm (Cut-to-length service available)

Application
Carpet (suits 4-6mm thickness)

Insert Colours

Black

Yellow

Light Grey

Luminescent

Aluminium Colours

Black


Natural

Upon request

Bronze

Saffron

Gold

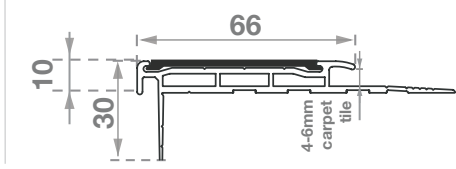

Multiple Applications



Classic Tredfx

PKD444

Aluminium Safety Stair Nosing
for Carpet Applications

- Interior use
- Gripper back, short raked front
- Grit insert

LRV Rating
(pg 90)

P5 Slip
resistance
rating

Fire
Resistant

Specifications

Length
5850mm (Cut-to-length service available)

Application
Carpet (suits 4-6mm thickness)


Insert Colours

Black/Natural Yellow/Natural White/Natural Black/Black

Aluminium Colours

Black Natural
Upon request

Bronze Saffron Gold

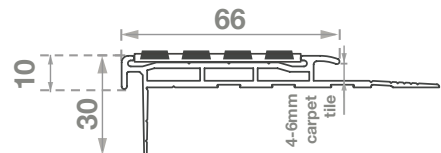

Classic Tredfx

Rebated - Timber / Tile

Stair Nosings

- Suitable for rebated applications - timber and tiles
- Modern, low profile and streamlined
- Hard wearing
- Aluminium nosings to suit wide range of substrates
- Large range of nosing insert colour options, available in ribbed polymer, ribbed aluminium and grit
- Interior and exterior use
- Select a product with a slip resistant rating that suits your project's needs
- LRV wet and dry ratings, pg. 90
- Looking for solid brass? refer pg. 58

**LIFETIME
WARRANTY**

**INSTALLATION
SERVICES
AVAILABLE**



Classic Tredfx

INB033

Aluminium Safety Stair Nosing for Rebated Applications

- Interior and exterior use
- Square back, square front
- Ribbed metal



LRV Rating (pg 90)



P4 Slip resistance rating



Fire Resistant



AS1428 NCC Compliant

Specifications



Length

5850mm (Cut-to-length service available)

Application

Rebated - Timber / Tile

Aluminium Colours

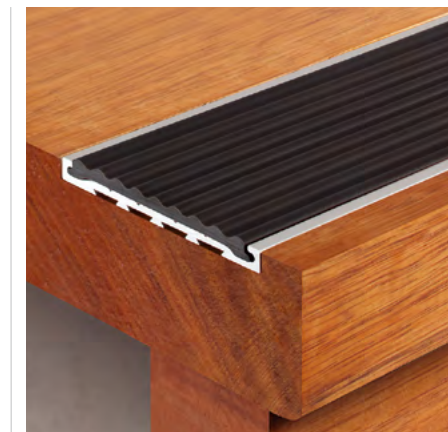

Classic Tredfx

IBB121

Aluminium Safety Stair Nosing for Rebated Applications

- Interior and exterior use
- Square back, square front
- Ribbed polymer insert
- Pre-drilled and countersunk



LRV Rating (pg 90)



P3 Slip resistance rating



Fire test report available



AS1428 NCC Compliant

Specifications

Length

5850mm (Cut-to-length service available)

Application

Rebated - Timber / Tile

Insert Colours



Aluminium Colours



Classic Tredfx

IKB121

Aluminium Safety Stair Nosing for Rebated Applications

- Interior and exterior use
- Square back, square front
- Grit insert
- Pre-drilled and countersunk



LRV Rating (pg 90)



P5 Slip resistance rating



Fire test report available



AS1428 NCC Compliant

Specifications

Length

5850mm (Cut-to-length service available)


Application

Rebated - Timber / Tile

Insert Colours



Aluminium Colours

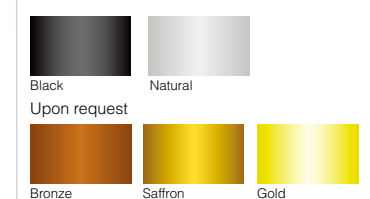



Classic Tredfx

IMB121

Aluminium Safety Stair Nosing
for Rebated Applications

- Interior and exterior use
- Square back, squared front
- Ribbed aluminium insert

LRV Rating
(pg 90)

P4 Slip
resistance
rating

Fire
Resistant

AS1428
NCC
Compliant

Specifications

Length

5850mm (Cut-to-length service available)

Application

Rebated - Timber / Tile

Insert Colours

Black

Natural

Platinum

Aluminium Colours


Black

Natural

Bronze

Saffron

Gold



Classic Tredfx

IKB439

Aluminium Safety Stair Nosing
for Rebated Applications

- Interior and exterior use
- Square back, square front
- Grit insert

LRV Rating
(pg 90)

P5 Slip
resistance
rating

Fire test
report
available

Specifications

Length

5850mm (Cut-to-length service available)

Application

Rebated - Timber / Tile

Insert Colours

Black/Natural

Yellow/Natural

White/Natural

Black/Black



Classic Tredfx

IBB140

Aluminium Safety Stair Nosing
for Rebated Applications

- Interior and exterior use
- Square back, short raked front
- Ribbed polymer insert

LRV Rating
(pg 90)

P3 Slip
resistance
rating

Fire test
report
available

AS1428
NCC
Compliant

Specifications

Length

5850mm (Cut-to-length service available)

Application

Rebated - Timber / Tile

Insert Colours

Black

Blue

Dark Grey

Red

Tangerine

Mid Grey

Yellow

Beige

Light Grey

White

Ultra Violet

Raspberry

Teal

Lime Green

Coral

Aluminium Colours


Black

Natural

Bronze

Saffron

Gold



Classic Tredfx

IKB140

Aluminium Safety Stair Nosing
for Rebated Applications

- Interior and exterior use
- Square back, short raked front
- Grit insert

LRV Rating
(pg 90)

P5 Slip
resistance
rating

Fire test
report
available

AS1428
NCC
Compliant

Specifications

Length

5850mm (Cut-to-length service available)

Application

Rebated - Timber / Tile

Insert Colours

Black

Yellow

Light Grey

Luminescent

Aluminium Colours


Black

Natural

Bronze

Saffron

Gold



Classic Tredfx

IKB440

Aluminium Safety Stair Nosing
for Rebated Applications

- Interior and exterior use
- Square back, short raked front
- Grit insert

LRV Rating
(pg 90)

P5 Slip
resistance
rating

Fire test
report
available

Specifications

Length

5850mm (Cut-to-length service available)

Application

Rebated - Timber / Tile

Insert Colours

Black/Natural

Yellow/Natural

White/Natural

Black/Black

Aluminium Colours


Black

Natural

Bronze

Saffron

Gold



Classic Tredfx Fibreglass

Stair Nosings

- Fibreglass stair nosings
- Suitable for surface mount applications
- Ideal for industrial use
- Withstands extreme conditions
- Withstands high levels of moisture
- Resistant to most chemicals
- Non-conductive and fire resistant
- Highest P5 slip resistance rating
- Options for interior and exterior use
- LRV wet and dry ratings, pg. 90

**LIFETIME
WARRANTY**

**INSTALLATION
SERVICES
AVAILABLE**



Classic Tredfx GKR030

Fibreglass Anti-Slip Stair Nosing
for Surface Mount Applications

- Exterior use
- Ramped back, short square front
- Rugged anti-slip fibreglass



LRV Rating
(pg 90)



P5 Slip
resistance
rating



Fire test
report
available



Compliant

Specifications

Length
5850mm
(Cut-to-length service available)

Application
Surface Mount


Nosing Colours



Black



Yellow



Classic Tredfx GKR017

Fibreglass Anti-Slip Stair Nosing
for Surface Mount Applications

- Exterior use
- Ramped back, square front
- Rugged anti-slip fibreglass



LRV Rating
(pg 90)



P5 Slip
resistance
rating



Fire test
report
available

Specifications

Length
1200mm, 2400mm and 5850mm
(Cut-to-length service available)

Application
Surface Mount


Nosing Colours



Black



Yellow

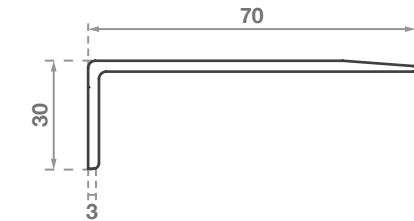

Classic Tredfx TKR016

Traction Bar
for Surface Mount Applications

- Interior and exterior use
- Ramped edges
- Slip-resistant grit
- Can also be used for stairs



LRV Rating
(pg 90)



P5 Slip
resistance
rating



Fire test
report
available



Compliant

Specifications

Length
1200mm, 2400mm and 5850mm
(Cut-to-length service available)

Application
Surface Mount

Profile Colours



Black



Yellow



Anti-Slip Tapes

Stair Nosings

- Anti-slip tapes
- Self-adhesive for affordable and easy installation
- Ideal for access ramps
- Colours - black, yellow, clear and white
- Interior and exterior use
- Select a product with a slip resistant rating that suits your project's needs
- LRV wet and dry ratings, pg. 90



3M General Purpose Tape

Anti-Slip Self-Adhesive Tape

- Interior and exterior use
- Slip-resistant material
- Mineral coated
- Highly durable



LRV Rating
(pg 90)



P5 Slip
resistance
rating



Fire test
report
available



AS1428
NCC
Compliant

Specifications
Length
18.2 metres
Width
25mm, 50mm, 100mm
(other widths available on request)
Application
Surface Mount
Tape Colours



Black Yellow Clear



3M Conformable Tape

Anti-Slip Self-Adhesive Tape

- Interior and exterior use
- Slip-resistant material
- Pliable aluminium backing
- Suits irregular surfaces



LRV Rating
(pg 90)



P5 Slip
resistance
rating



Fire test
report
available



AS1428
NCC
Compliant

Specifications
Length
18.2 metres
Width
50mm, 100mm
(other widths available on request)
Application
Uneven Surfaces
Tape Colours



Black Yellow



Classic Tredfx Grit Tape

Anti-Slip Self-Adhesive Tape

- Interior and exterior use
- Slip-resistant material
- Mineral coated
- Self adhesive



LRV Rating
(pg 90)



P5 Slip
resistance
rating



Fire test
report
available



AS1428
NCC
Compliant

Specifications
Length
20 metres
Width
50mm
Application
Surface Mount
Tape Colours



Black Yellow Grey White

Accessories

Stair Nosings

- Accessories for stair nosings
- Adhesive options to assist with easy installation
- Suitable for Classic Tredfx stair nosings



3M
Spray Adhesive 77
Adhesive Spray

- Multi-purpose and fast drying adhesive

Benefits
Helps to prepare porous surfaces before application of 3M Safety-Walk Slip-Resistant tapes.

Application
For 3M Safety-Walk tape products.

Size
467g spray can



Classic Tredfx
CA290 Adhesive
Instant Grab Construction Adhesive

- Excellent adhesion on almost all types of surfaces
- High abrasion and tear strength
- UV, water (salt and fresh) and weather resistant
- Instant grab

Benefits
Instant grab characteristics. High durability with good weathering and water resistance. Ready for immediate use in 290ml cartridge. Works on almost all surfaces.

Application
Can be applied to almost any surface. Always test prior to application. Not recommended for application on PE, PP, PC, PMMA, PTFE, Neoprene, Teflon, bituminous surfaces, or for continual water immersion and expansion joints. Great for interior and exterior applications for building and industry situations.

It is advised that CA290 is applied with a heavy-duty applicator gun. CA290 must be applied in volumes relating to material surface and weight of object, through large V shaped nozzles (as supplied). Apply in triangular beads, approximately 20 mm apart, then press the 2 materials together firmly so that the thickness is no thinner than 3mm. CA290 should not be applied in dots. If applied correctly no support is required during curing.

Size
290ml

STAIR NOSING

LRV Guide

What is luminance contrast testing?

Luminance contrast is a measure that compares the luminance reflectance of two different surfaces. Reports are produced from information collected on site, to document the compliance/non-compliance to building standards.

Luminescent Test Results

All values shown were measured in accordance with the requirements of AS/NZS 1428.4.1:2009 & AS1428.1-2009 using a Konica Minolta Chroma meter CR-400/410 with a diffuse illumination/normal viewing (d/o) geometry and CIE D65 illuminant. The products were tested in multiple locations, and results have been averaged out, and rounded up to the nearest whole decimal. This data should be used as a guide only.

Need luminance contrast testing on your project?
Contact Classic now for advice.

POLYMER INSERTS

Colour	Dry	Wet
Black	4.1	3.5
Blue	8.7	7.5
Dark Grey	6.5	6.1
Red	17.8	16.6
Tangerine	24.6	23.5
Mid Grey	24.4	23.9
Yellow	57.0	56.7
Beige	51.6	50.1
Light Grey	45.4	44.7
White	74.9	74.2
Ultra Violet	20.1	19.6
Raspberry	22.1	22.0
Teal	23.6	23.1
Lime Green	35.4	35.3
Coral	34.0	34.0

GRIT INSERTS

Colour	Dry	Wet
Black	4.8	2.3
Yellow	51.0	48.3
Light Grey	55.3	52.0
Luminescent	39.3	38.0

ALUMINIUM INSERTS

Colour	Dry	Wet
Black	3.4	2.3
Natural	54.8	53.5
Bronze	8.2	7.5
Saffron	42.1	38.4
Gold	49.8	45.4
Platinum	58.2	52.1

SOLID BRASS NOSING

Colour	Dry	Wet
Natural Brass	51.8	43.5

FIBREGLASS NOSING

Colour	Dry	Wet
Black	4.6	4.0
Yellow	40.1	38.5

ANTI-SLIP TAPES

Colour	Dry	Wet
3M GENERAL PURPOSE TAPE		
Black	5.1	3.4
Yellow	50.3	43.9
Grey	17.3	17.0
3M CONFORMABLE TAPE		
Black	5.9	3.4
Yellow	50.3	43.9
GRIT TAPE		
Black	5.1	3.4
Yellow	50.3	43.9
Grey	17.3	17.0
White	82.3	88.8





1300 244 377

info@classic-arch.com

www.classic-arch.com

Melbourne • Sydney • Brisbane
Adelaide • Perth • Auckland

