




classic
architectural group

For Every Step

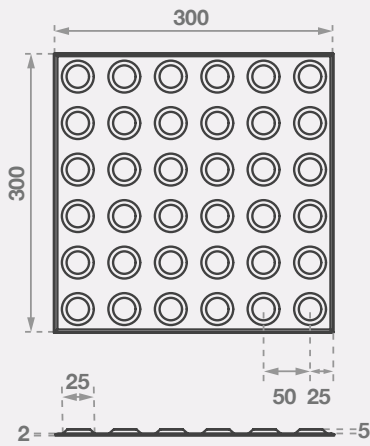

**LIFETIME
WARRANTY**

**INSTALLATION
SERVICES
AVAILABLE**

**NCC
COMPLIANT**

**AS1428
COMPLIANT**



LRV (Light Reflectance Value) available



P5 Slip resistance rating



Fire test report available

Classic Tredfx

PT30

Polyurethane TGS1 Warning Tactile Tile Format

The PT30 is a proven tactile indicator, sized as 300 x 300 square tiles. Designed to retro-fit over almost any substrate, these tactiles provide installers and building owners with a simple and cost effective way of installing tactile indicators. The PT30 is a manufactured from UV resistant, premium polyurethane material and its design complies with relevant Australian Standards.


Features

- Grooved 6 ring top
- 300mm x 300mm
- Bevelled edge for safe transition
- UV resistant polyurethane material

Application

Interior and exterior

Colours

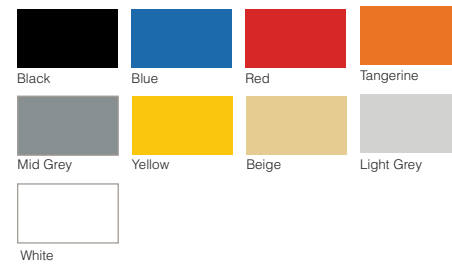

LRV Guide

| Colour | Dry | Wet |
|------------|------|------|
| Black | 2.4 | 2.6 |
| Blue | 5.4 | 5.5 |
| Red | 12.5 | 12.2 |
| Tangerine | 24.7 | 24.9 |
| Mid Grey | 16.1 | 16.1 |
| Yellow | 41.3 | 42.2 |
| Beige | 29.8 | 30.2 |
| Light Grey | 43.2 | 43.3 |
| White | 67.0 | 65.4 |

