



classic
architectural group

For Every Step

Classic Tredfx

SH75N

Stainless Steel TGSi with Polyurethane Insert

The Stainless Steel range continues to be the best and the longest lasting solution when fitting tactile ground surface indicators. Ideal for retro-fitting. Available in various styles that all allow the surrounding floor surface to show between the tactile indicators for an architecturally superior appearance.

Features

- Grooved 10 ring polyurethane insert
- Plain sides
- Rear nylon stud
- Sloped sides for safe transition
- T316 grade stainless steel

Application

Interior and exterior

Stainless Steel Colours



Silver

Insert Colours



Black




Yellow



White

LRV Guide

Colour	Dry	Wet
Black	3.0	2.7
White	64.2	63.8
Yellow	57.9	57.7

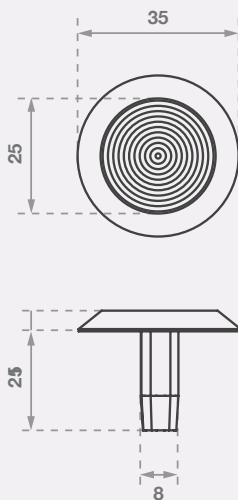

**LIFETIME
WARRANTY**

**INSTALLATION
SERVICES
AVAILABLE**

**NCC
COMPLIANT**

**AS1428
COMPLIANT**



LRV (Light Reflectance Value) available



P5 Slip resistance rating