




**classic**  
architectural group

**For Every Step**

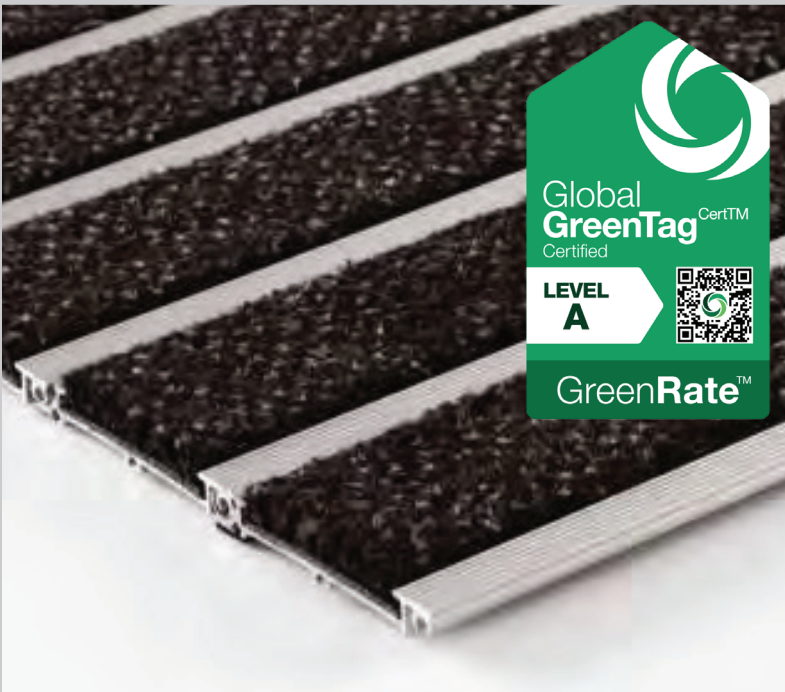

## Classic Integra

# Vantt 5500

## Roll-up Aluminium Matting

Classic's Integra Vantt matting is Australia's Only Global GreenTag<sup>Cert™</sup> GreenRate<sup>™</sup> Level A certified entrance matting\*. Specify Integra Vantt on your next project to earn maximum Green Star credit points and promote a healthier built environment.

The Integra Vantt 5500 features an innovative flexible interlocking system that allows for easy customisation to fit any shape, with individually replaceable slats to ensure long-lasting performance. The matting inserts are made from our premium Zone product, a non-static polyamide pile matting that delivers exceptional cleaning results. Unlike competitors, our inserts are constructed as a complete piece per strip, providing greater durability and ensuring the mat retains its sleek, premium look for years, without gaps or movement.

The aluminium frame is made from low-emission materials, and the Zone inserts are GUT-certified, meeting our strict sustainability standards. The efficient framing system ensures straightforward installation, while local manufacturing and supply contribute to shorter lead times, typically under two weeks.

\*Please note our Ribbed Polymer and Grit inserts are not GreenTag<sup>™</sup> certified.

### Application


Classic Integra Vantt 5500 requires a depth of 14mm, therefore can be either surface mounted or recessed into airlocks and lobbies. The product can be cut into any shape or form providing the solution for architecturally shaped entrances and revolving doorways.

### Suitable for:

Commercial office buildings, residential apartments, sporting facilities, shopping centres, hotels, airports, schools and universities, hospital and aged care homes, all public domains – libraries, etc.

### Water Drainage

The aluminium slats have a .5mm gap that allows for drainage down into the channel that connects the slats together. Water can move along this channel and out into the recess. In addition to this, a 2mm gap around the entire edge of the mat perimeter, between the mat and the mat frame, also allows water to drain from the mat surface.

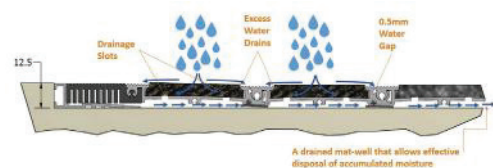

Global GreenTag<sup>Cert™</sup> GreenRate<sup>™</sup> Level A Certified

Suitable for high traffic applications

Easy to clean, highly effective scrape and wipe cleaning action

Wheelchair friendly

Rubber cushioned back for quietness underfoot

Rolls up easily for cleaning

Easily shaped for curved entrances or revolving doors

Easy interlocking system

Fire test report available

LRV (Light Reflectance Value) available

P5 Slip resistance rating




**LIFETIME  
WARRANTY**

**INSTALLATION  
SERVICES  
AVAILABLE**


**NCC  
COMPLIANT**

**AS1428  
COMPLIANT**


## Matting Colours




Midnight



Storm




Ribbed Polymer



Grit



Solar



Haze



Coco

## Aluminium Colours



Black



Natural

Upon request



Bronze



Saffron



Gold

## Features

- **Sustainable:** Australia's only Global GreenTag<sup>Cert™</sup> GreenRate™ Level A certified matting.
- **Customisable:** Flexible system with replaceable slats.
- **Premium Quality:** Durable, gap-free Zone inserts for superior cleaning.
- **Eco-Friendly:** Low-emission frame and GUT-certified inserts.
- **Fast Delivery:** Locally made with under two-week lead times.

## Environmental Assessment

**Global GreenTag<sup>Cert™</sup> GreenRate™ Level A**  
Integra Vantt is the only entrance matting on the market to have achieved this prestigious Level A Certification.

### VOC Emission

ISO 16000-6, EN 10580 TVOC after 4 weeks ≤ 100 ug/m<sup>3</sup>

### GUT Certification

PRODIS-GUT Certificate D3F1CA7E This fulfills the GUT requirements (compliance with thresholds and ban of use regarding VOC emissions, harmful substances and odor)

### L.I.F.E. Program

Product takeback program. This product's manufacture is environmentally compatible, and includes the use of recycled materials and production waste, and the use of recycled raw materials.



## Specification Guide

### Nominal Size

Made to order

### Custom Shaping

Yes can be shaped to any size and shape

### Construction

ISO 2424 Tufted cutpile

### Pile Yarn Composition

ISO 2424 10 0% PA6

### Pile Weight

900 g/m<sup>2</sup> nom

### Pile Height

ISO 1765 5.8mm average

### Total Thickness

ISO 1765 10.0mm average

### Total Mass

ISO 8543 8000 g/m<sup>2</sup> nom

### Backing

Non woven polymer matrix, with Intraback vinyl backing

### Colours

Midnight, Storm, Ribbed Polymer, Grit, Solar, Haze and Coco

### Frames

**Recessed:** Suits the INFR10 framing system

**Surface:** Suits the IRF1180 Ramp framing system

## Performance Guide

### Classification

EN 1307 Commercial

### Flammability

Radiant Panel test ASISO 9239.1-2003  
Certificate No. 7-586702-AV  
- CRF = 8.1 kW/m<sup>2</sup>  
- Smoke = 192 %.minutes

### Colorfastness

-to light	ISO 105-B02	≥5
-to rubbing	ISO 105-X12	≥4
	(wet & dry)	
-to water	ISO 105-E01	≥4
-to soiling	EN 1269	≥3,5

### Electrostatic Resistance

EN 14041Yes