



classic
architectural group

For Every Step



Classic Integra

Vantt 5500

Roll-up Aluminium Matting

The Classic Integra Vantt 5500 innovative flexible interlocking system features an alternating pattern of aluminium scraper bars incorporating the Zone non-static polyamide pile matting for optimum cleaning results. For an entrance where you may have one external to internal entrance mat, install the Classic Integra Vantt 5500 with the polymer scraper insert externally for slip resistance and removal of larger particles, and continue the mat through internally with the high quality polyamide matting insert for superior fine particle and moisture removal.



Application









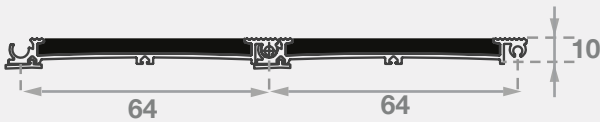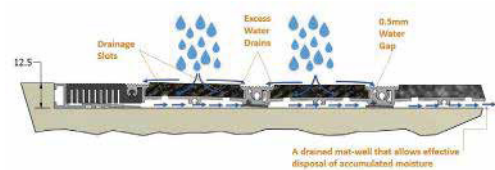

Recess into mat wells, surface mount with ramp frame, wall-to-wall in airlocks and lobbies. Able to be cut into any shape or form providing the solution for architecturally shaped entrances and revolving doorways.

Suitable for: Commercial office buildings, shopping centres, hotels, motels, airports, schools and universities, hospital and aged care homes, all public domains - libraries, etc.

Water Drainage

The aluminium slats have a .5mm gap that allows for drainage down into the channel that connects the slats together. Water can move along this channel and out into the recess. In addition to this, a 2mm gap around the entire edge of the mat perimeter, between the mat and the mat frame, also allows water to drain from the mat surface.



-  Suitable for high traffic applications
-  Easy to clean, highly effective scrape and wipe cleaning action
-  Wheelchair friendly
-  Rubber cushioned back for quietness underfoot
-  Rolls up easily for cleaning
-  Easily shaped for curved entrances or revolving doors
-  Easy interlocking system
-  Fire test report available
-  Made from recyclable materials
-  P5 Slip resistance rating

**LIFETIME
WARRANTY**

**INSTALLATION
SERVICES
AVAILABLE**

**NCC
COMPLIANT**

**AS1428
COMPLIANT**

Matting Colours



Midnight




Storm



Ribbed Polymer



Grit



Slate



Clay



Cobalt



Lava



Sulphur



Solar



Haze



Coco

Aluminium Colours



Black



Natural

Upon request



Bronze



Saffron



Gold

Features

- Colour range co-ordinates with the Integra Zone range of matting and enables a cohesive colour flow
- Reduces cleaning time of surrounding floor finishes
- Minimises costly slip-and-fall accidents
- Stops dirt at the door for a cleaner environment
- Enhances entrance appearance and acoustics

Environmental Assessment

VOC Emission


ISO 16000-6, EN 10580 TVOC after 4 weeks \leq 100 ug/m³

Green Certification

PRODIS-GUT Certificate D3F1CA7E This fulfills the GUT requirements (compliance with thresholds and ban of use regarding VOC emissions, harmful substances and odor)

L.I.F.E. Program

Product takeback program. This product's manufacture is environmentally compatible, and includes the use of recycled materials and production waste, and the use of recycled raw materials.

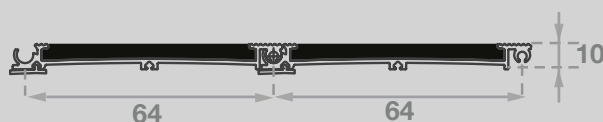

Specification Guide

Nominal Size

Made to order

Custom Shaping

Yes can be shaped to any size and shape

Construction

ISO 2424 Tufted cutpile

Pile Yarn Composition

ISO 2424 10 0% PA6

Pile Weight

900 g/m² nom

Pile Height

ISO 1765 5.8mm average

Total Thickness

ISO 1765 10.0mm average

Total Mass

ISO 8543 8000 g/m² nom

Backing

Non woven polymer matrix, with Intraback vinyl backing

Frames

Recessed: Suits the INFR11 framing system

Surface: Suits the INFR1180 ramp framing system

Performance Guide

Classification

EN 1307 Commercial

Flammability

Radiant Panel test ASISO 9239.1-2003
Certificate No. 7-586702-AV
- CRF = 8.1 kW/m²
- Smoke = 192 %.minutes

Colorfastness

-to light ISO 105-B02 \geq 5

-to rubbing ISO 105-X12 \geq 4

(wet & dry)

-to water ISO 105-E01 \geq 4

-to soiling EN 1269 \geq 3,5

Electrostatic Resistance

EN 14041Yes