



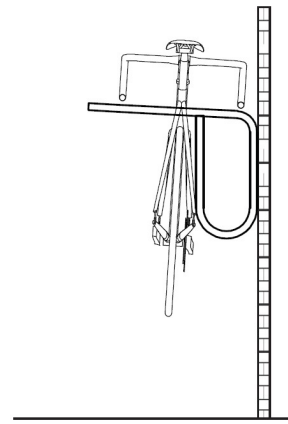

## Installation Guide

# EziHorizo Square Bike Rack

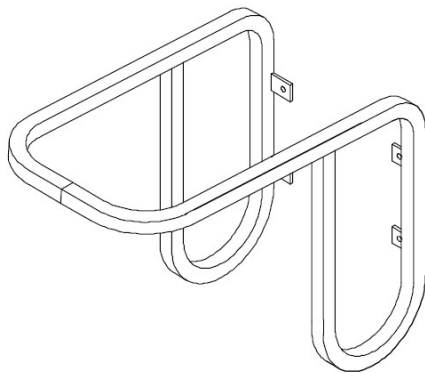


## Site Selection

Suitable locations include;

- Above vehicle bonnet with appropriate clearance
- Adjacent to entrance doors and in line of sight of a window

## Access and Clearance


Racks should be mounted at a height appropriate for a specific vehicle if clearance above the vehicle bonnet is required. Measures shown are an example only.

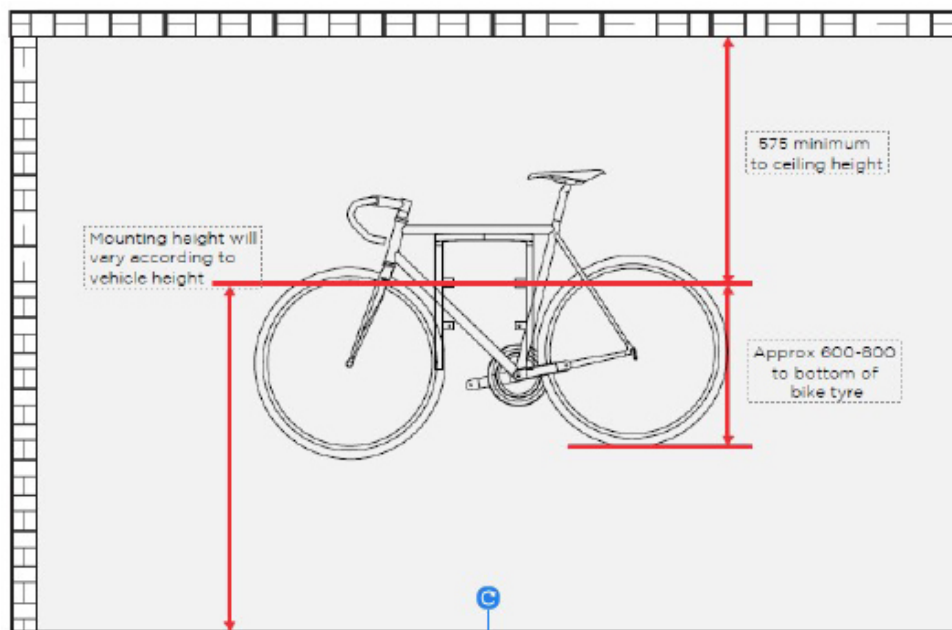




## Installation Guide

# EziHorizo Square Bike Rack

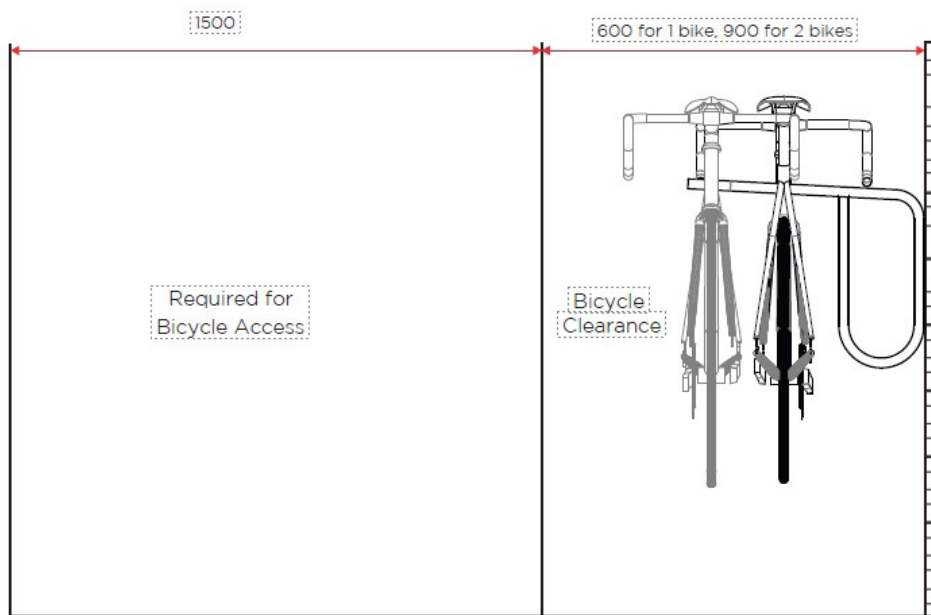

## Locate and Measure


- Locate suitable area for rack installation with correct clearance on all sides.
- Draw a horizontal line to mark height of higher fixing point.



## Mark and Drill

- Place rack in desired position and mark all fixing points with a suitable marker.
- Drill holes using a 8mm masonry drill bit to a depth of 70mm. For best results use a 6mm bit first to prevent wandering of the larger bit. Clear holes of dust.

**Do not drill over plumbing and/or electrical conduits.**





**classic**  
architectural group


For Every Step®

## Installation Guide

# EziHorizo Square Bike Rack

### Fix

Place rack in position and partially tighten screws starting from the top position. Once all screws are in, continue to tighten until firm. Use the 4 screw bolts (M8 x 60mm) provided plus a 13mm socket and driver to secure the racks.

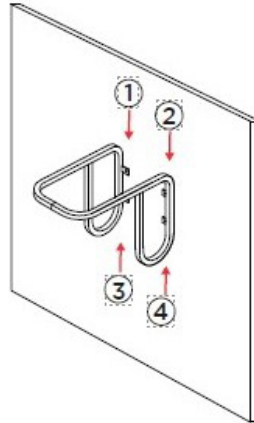

### Installation Complete

