



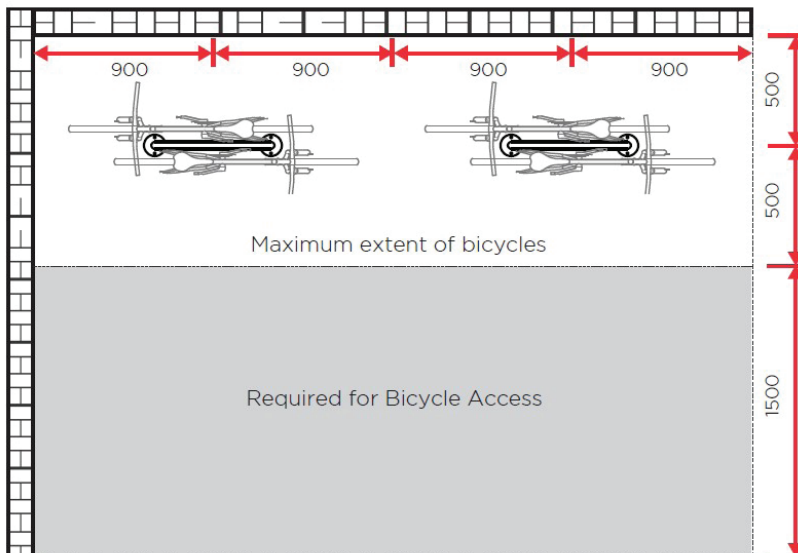

Installation Guide

Bicycle Rack - Hoop Cast In


Access & Clearance

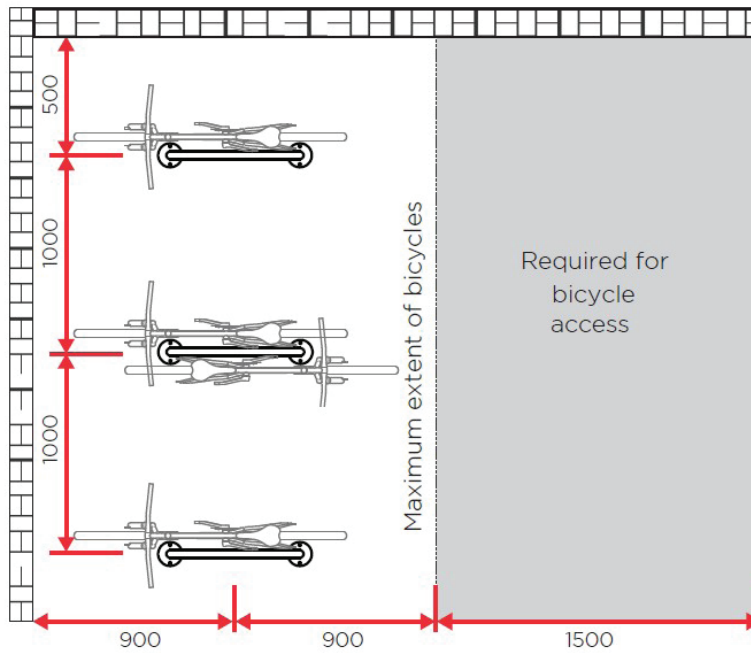



Installation Guide

Bicycle Rack - Hoop Cast In

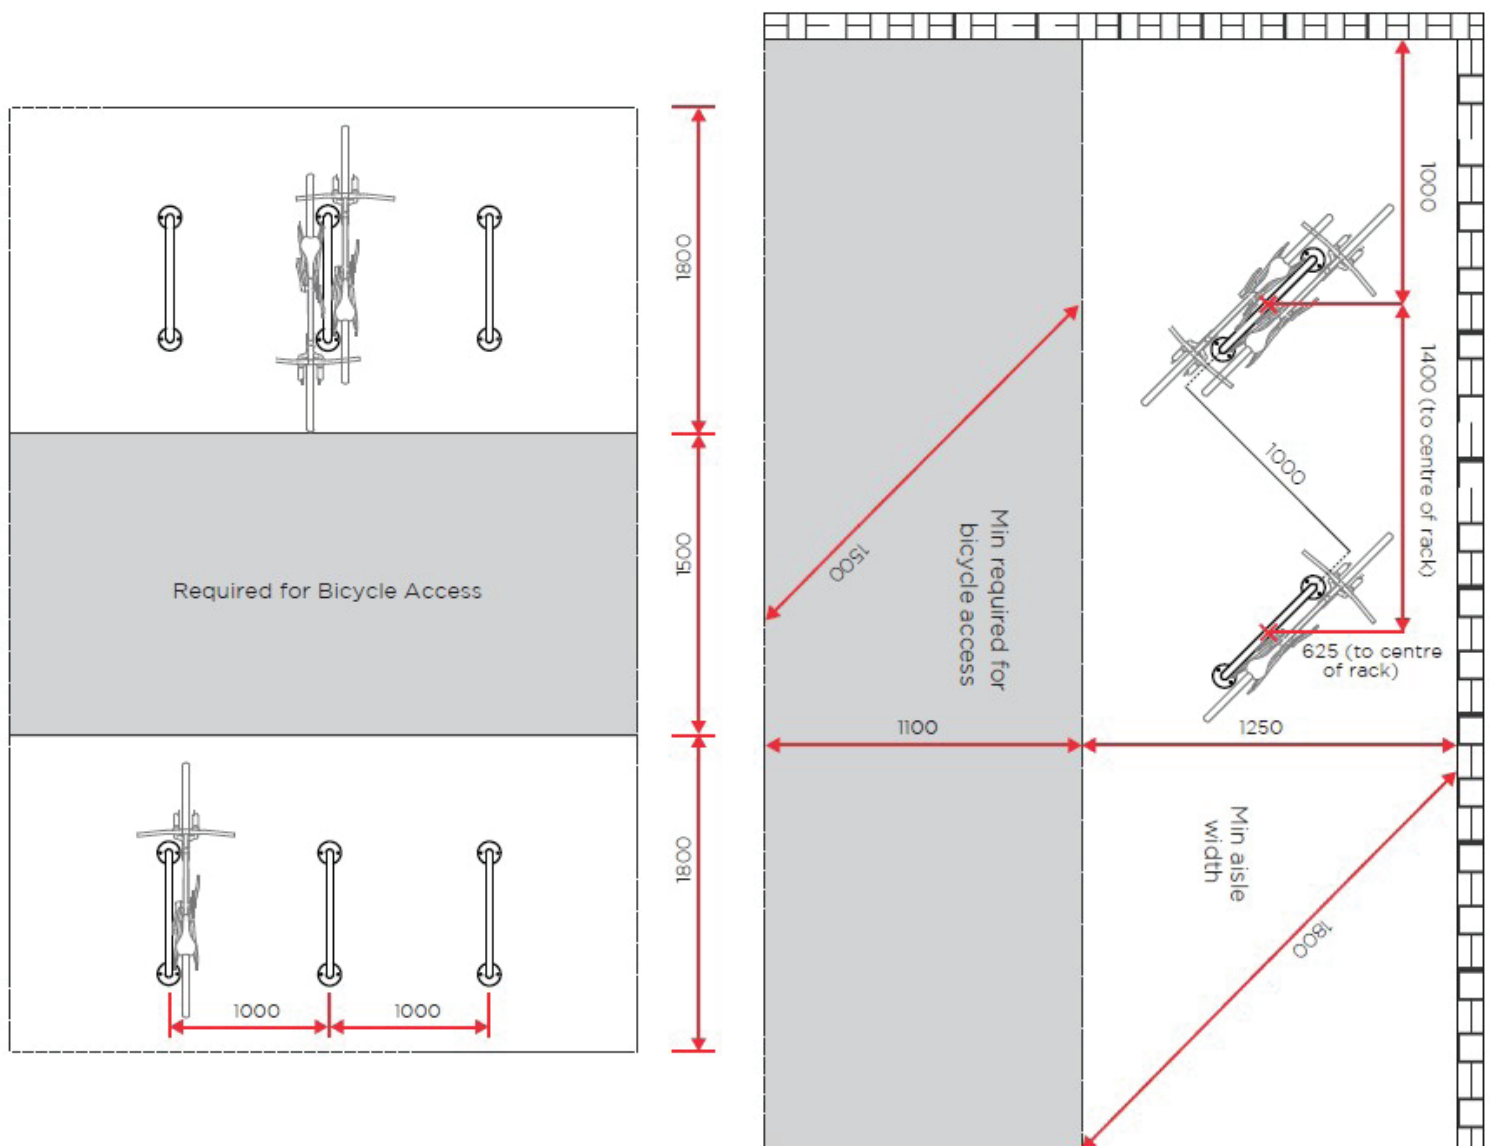

Access dimensions around racks;

- Before mounting rack, find a suitable place that will allow for minimum spacing dimensions
- Ensure minimum spacing from walls, other racks or obstructions to allow for minimum access
- In multiple rack instal, racks may be mounted in an in-line cluster, parallel cluster, or angle cluster.



Installation Guide

Bicycle Rack - Hoop Cast In

Fixing

- Prepare quick set concrete bases with minimum dimensions of 300 x 300 x 300mm.
- Place bike parking rail into the wet concrete base – sinking the rail 200mm deep.
- Secure bike parking rail in place and in correct vertical position until secure in concrete.

