



classic
architectural group

For Every Step®

Installation Guide

EziNest 4 Bike Rack



Tools Required

- Hammer
- Masonry Drill
- Socket Set (including 15mm socket)

Important Notes


- The P Style Bicycle Rack is supplied in either;
 - Flatpack for do-it-yourself installation. Rails and wheel supports are supplied unattached and can be quickly bolted to the base rail.
 - Fully welded and ready to install. This option is suited to areas that are prone to reckless or intentional abuse of community areas.
- Installing a P Style Bicycle Rack is a 1 person job
- Each rack will take approximately 45mins to install
- Racks should be installed on level ground
- Familiarise yourself with the whole assembly document before proceeding
- Set out the area with the required spacings of the assembled unit(s) (refer pg 6) to ensure correct placement prior to fixing units to the ground.



Installation Guide


EziNest 4 Bike Rack

Parts & Fittings



A

X 1




B

X 1



C

X 2



D

X 1




E

X 2



F

X 12



G

X 1



H

X 6

Materials

NO.	QTY	DESCRIPTION	NO.	QTY	DESCRIPTION
A	1	Leaning Rail With Label	E	2	Base Rail
B	1	Leaning Rail Without Label	F	12	Screw Socket C/S M12*20 SS304
C	2	Wheel Support Low	G	1	8mm Hex Key
D	1	Wheel Support High	H	6	Dynabolt 12mm(M10)×60mm Gal




Installation Guide


EziNest 4 Bike Rack

Step 1 - Measurements and Set Out - Access and Clearance

The P Style bike rack should be positioned to allow single sided access. If placing racks side by side, 300mm spaces should be allowed between racks.

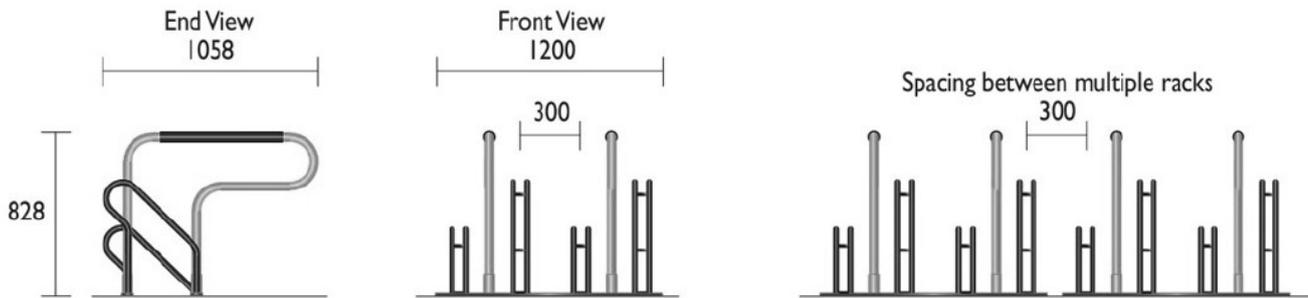

Step 2 - Assemble Unit

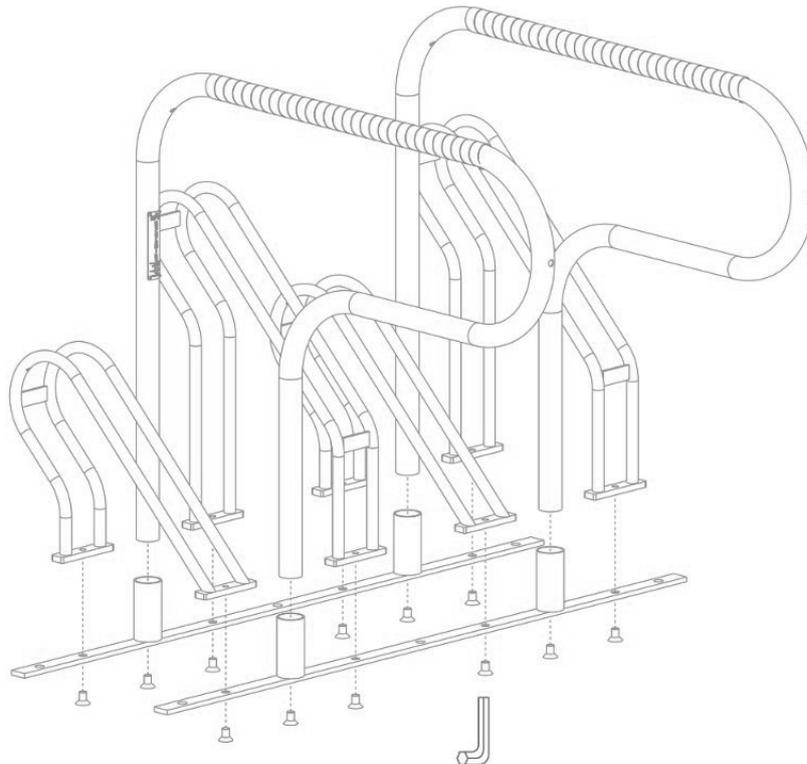

- (A) × 1 (C) × 2 (E) × 2 (G) × 1
(B) × 1 (D) × 2 (F) × 12





classic
architectural group

For Every Step®

Installation Guide

EziNest 4 Bike Rack

Step 3 - Fix to Ground

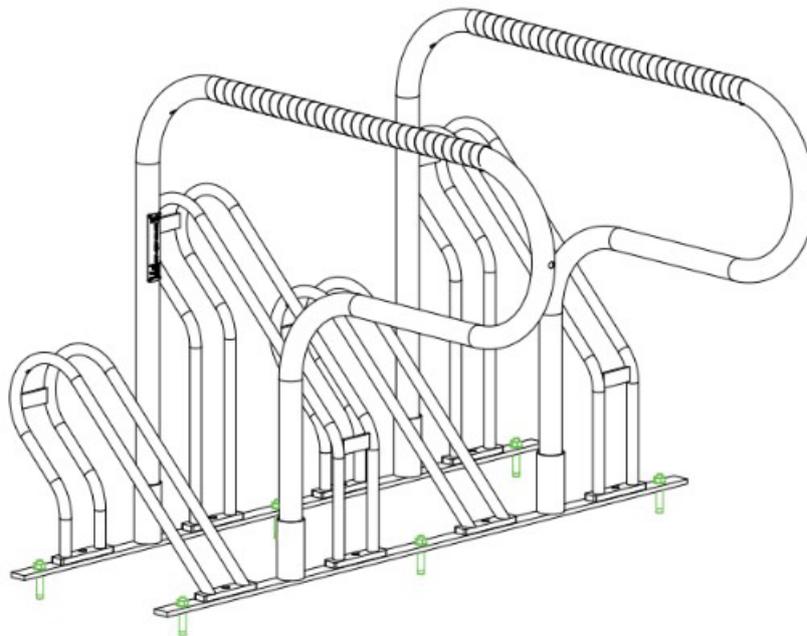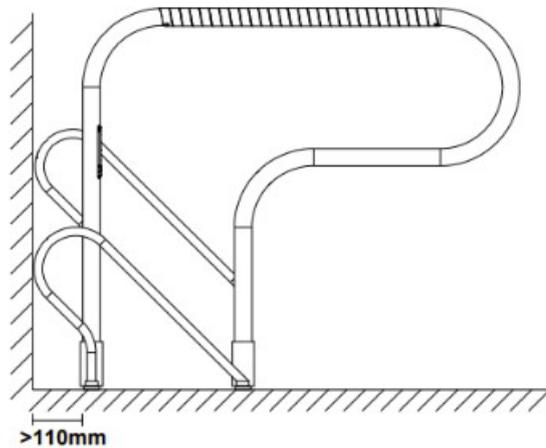

Ⓜ ×6

