



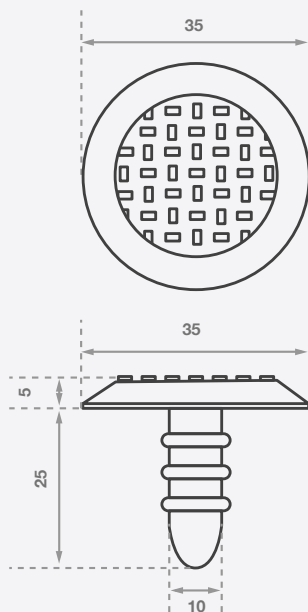

classic
architectural group

For Every Step

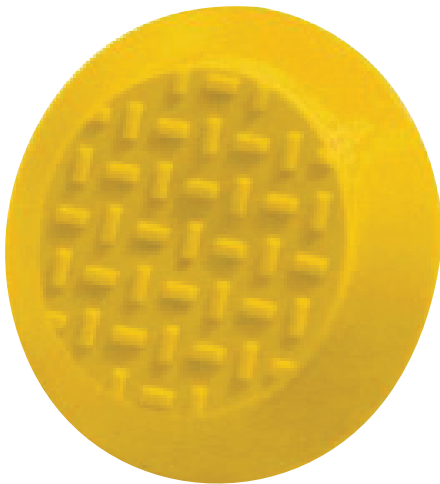

**LIFETIME
WARRANTY**

**INSTALLATION
SERVICES
AVAILABLE**

**NCC
COMPLIANT**

**AS1428
COMPLIANT**

Classic Tredfx

PH41P-RAIL

Polyurethane TGSI Individual Tactile for Rail Applications

The Polyurethane range of tactile indicators continues to provide an ultimate solution for the creative designer and specifier. They are designed for installation in aesthetically sensitive applications or where the use of vibrant colours is needed. Polyurethane individual tactiles allow the surrounding floor surface to show between the tactile indicators for an architecturally enhanced appearance.


Features

- Cross-hatch top
- Fin-shaft stud
- Fin-shaft rear stud specifically designed for rail applications
- Sloped sides for safe transition

Application

Interior and exterior

Colours

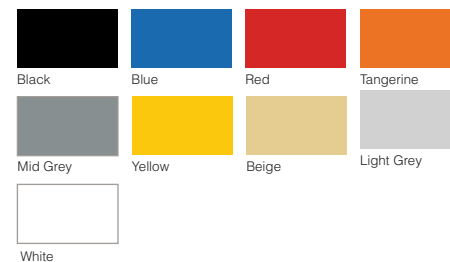

LRV Guide

Colour	Dry	Wet
Black	2.4	2.6
Blue	4.3	4.7
Red	8.5	9.2
Tangerine	25.4	25.7
Mid Grey	12.9	14.2
Yellow	49.0	48.8
Beige	33.5	34.7
Light Grey	47.8	47.7
White	61.3	62.1



LRV (Light Reflectance Value) available



P5 Slip resistance rating