



**classic**  
architectural group

**For Every Step**

## Classic Tredfx

# Pathfinder PD49 Asphalt

Polyurethane TGSi Individual Directional Bar Tactile

Classic's Polyurethane range of tactile indicators have been designed for safety and durability, and are an innovative tactile solution. Made from high quality polyurethane, these tactiles will last the distance. Even in the harsh Australian climate, they will not crack, fracture or chip with substrate movement. They are easy to install and can be used on a wide range of substrates.


### Features

- Bladed shaft
- Available in 300mm strips x 15mm shaft
- Available in Hazard and Directional profiles
- UV stable, extremely hard wearing and durable
- Specifically designed to be installed into asphalt

### Application

Interior and exterior

### Colours

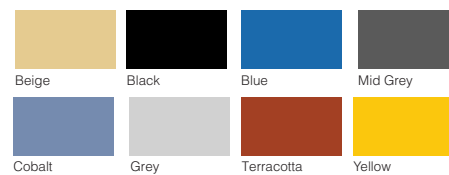


### LRV Guide

Colour	Dry
Beige	26.55
Black	5.21
Blue	9.40
Charcoal	13.48
Cobalt	16.40
Grey	17.01
Terracotta	11.80
Yellow	68.00



300.0



**LIFETIME  
WARRANTY**

**INSTALLATION  
SERVICES  
AVAILABLE**

**NCC  
COMPLIANT**

**AS1428  
COMPLIANT**



LRV (Light Reflectance Value) available



P5 Slip Resistance rating



Fire test report available