



classic
architectural group

For Every Step

Classic Tredfx

Pathfinder PD49 Concrete

Polyurethane TGSi Individual Directional Bar Tactile

Classic's Polyurethane range of tactile indicators have been designed for safety and durability, and are an innovative tactile solution. Made from high quality polyurethane, these tactiles will last the distance. Even in the harsh Australian climate, they will not crack, fracture or chip with substrate movement. They are easy to install and can be used on a wide range of substrates.


Features

- Bladed shaft
- Available in 300mm strips x 10mm shaft
- Available in Hazard and Directional profiles
- UV stable, extremely hard wearing and durable
- Specifically designed to be installed into concrete

Application

Interior and exterior

Colours

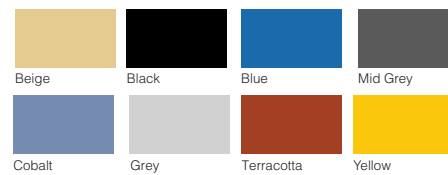


LRV Guide

Colour	Dry
Beige	26.55
Black	5.21
Blue	9.40
Charcoal	13.48
Cobalt	16.40
Grey	17.01
Terracotta	11.80
Yellow	68.00



300.0

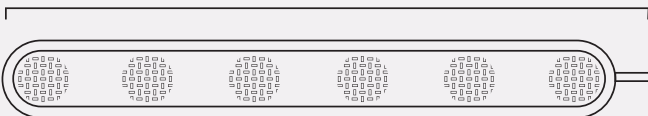

**LIFETIME
WARRANTY**

**INSTALLATION
SERVICES
AVAILABLE**

**NCC
COMPLIANT**

**AS1428
COMPLIANT**



LRV (Light Reflectance Value) available



P5 Slip Resistance rating



Fire test report available