



classic
architectural group

For Every Step



Classic Tredfx

Pathfinder PH41BS Asphalt

Polyurethane TGSi Tactile for Asphalt

Classic's Polyurethane range of tactile indicators have been designed for safety and durability, and are an innovative tactile solution. Made from high quality polyurethane, these tactiles will last the distance. Even in the harsh Australian climate, they will not crack, fracture or chip with substrate movement. They are easy to install and can be used on a wide range of substrates.


Features

- Bladed shaft
- Modular tactile
- Available in 300mm strips x 15mm shaft
- UV stable, extremely hard wearing and durable
- Specifically designed to be installed on asphalt

Application


Interior and exterior

Colours

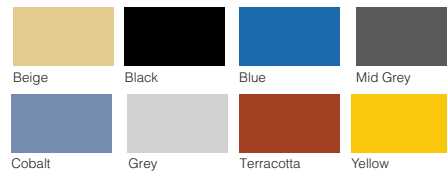

LRV Guide

Colour	Dry
Beige	26.55
Black	5.21
Blue	9.40
Charcoal	13.48
Cobalt	16.40
Grey	17.01
Terracotta	11.80
Yellow	68.00

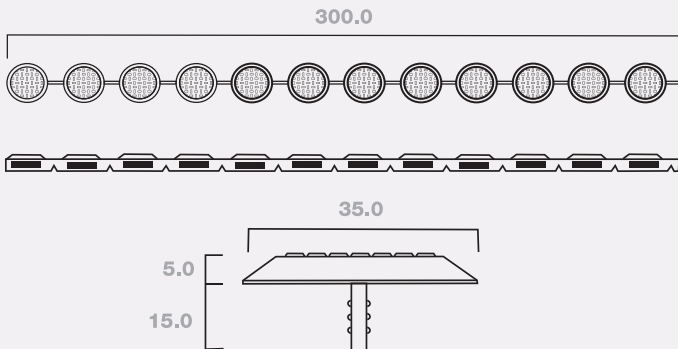

**LIFETIME
WARRANTY**

**INSTALLATION
SERVICES
AVAILABLE**

**NCC
COMPLIANT**

**AS1428
COMPLIANT**



LRV (Light Reflectance Value) available



R11 Slip Resistance rating



Fire test report available